


Réductions

Femelles / Femelles 316L usinées

DIN 2986

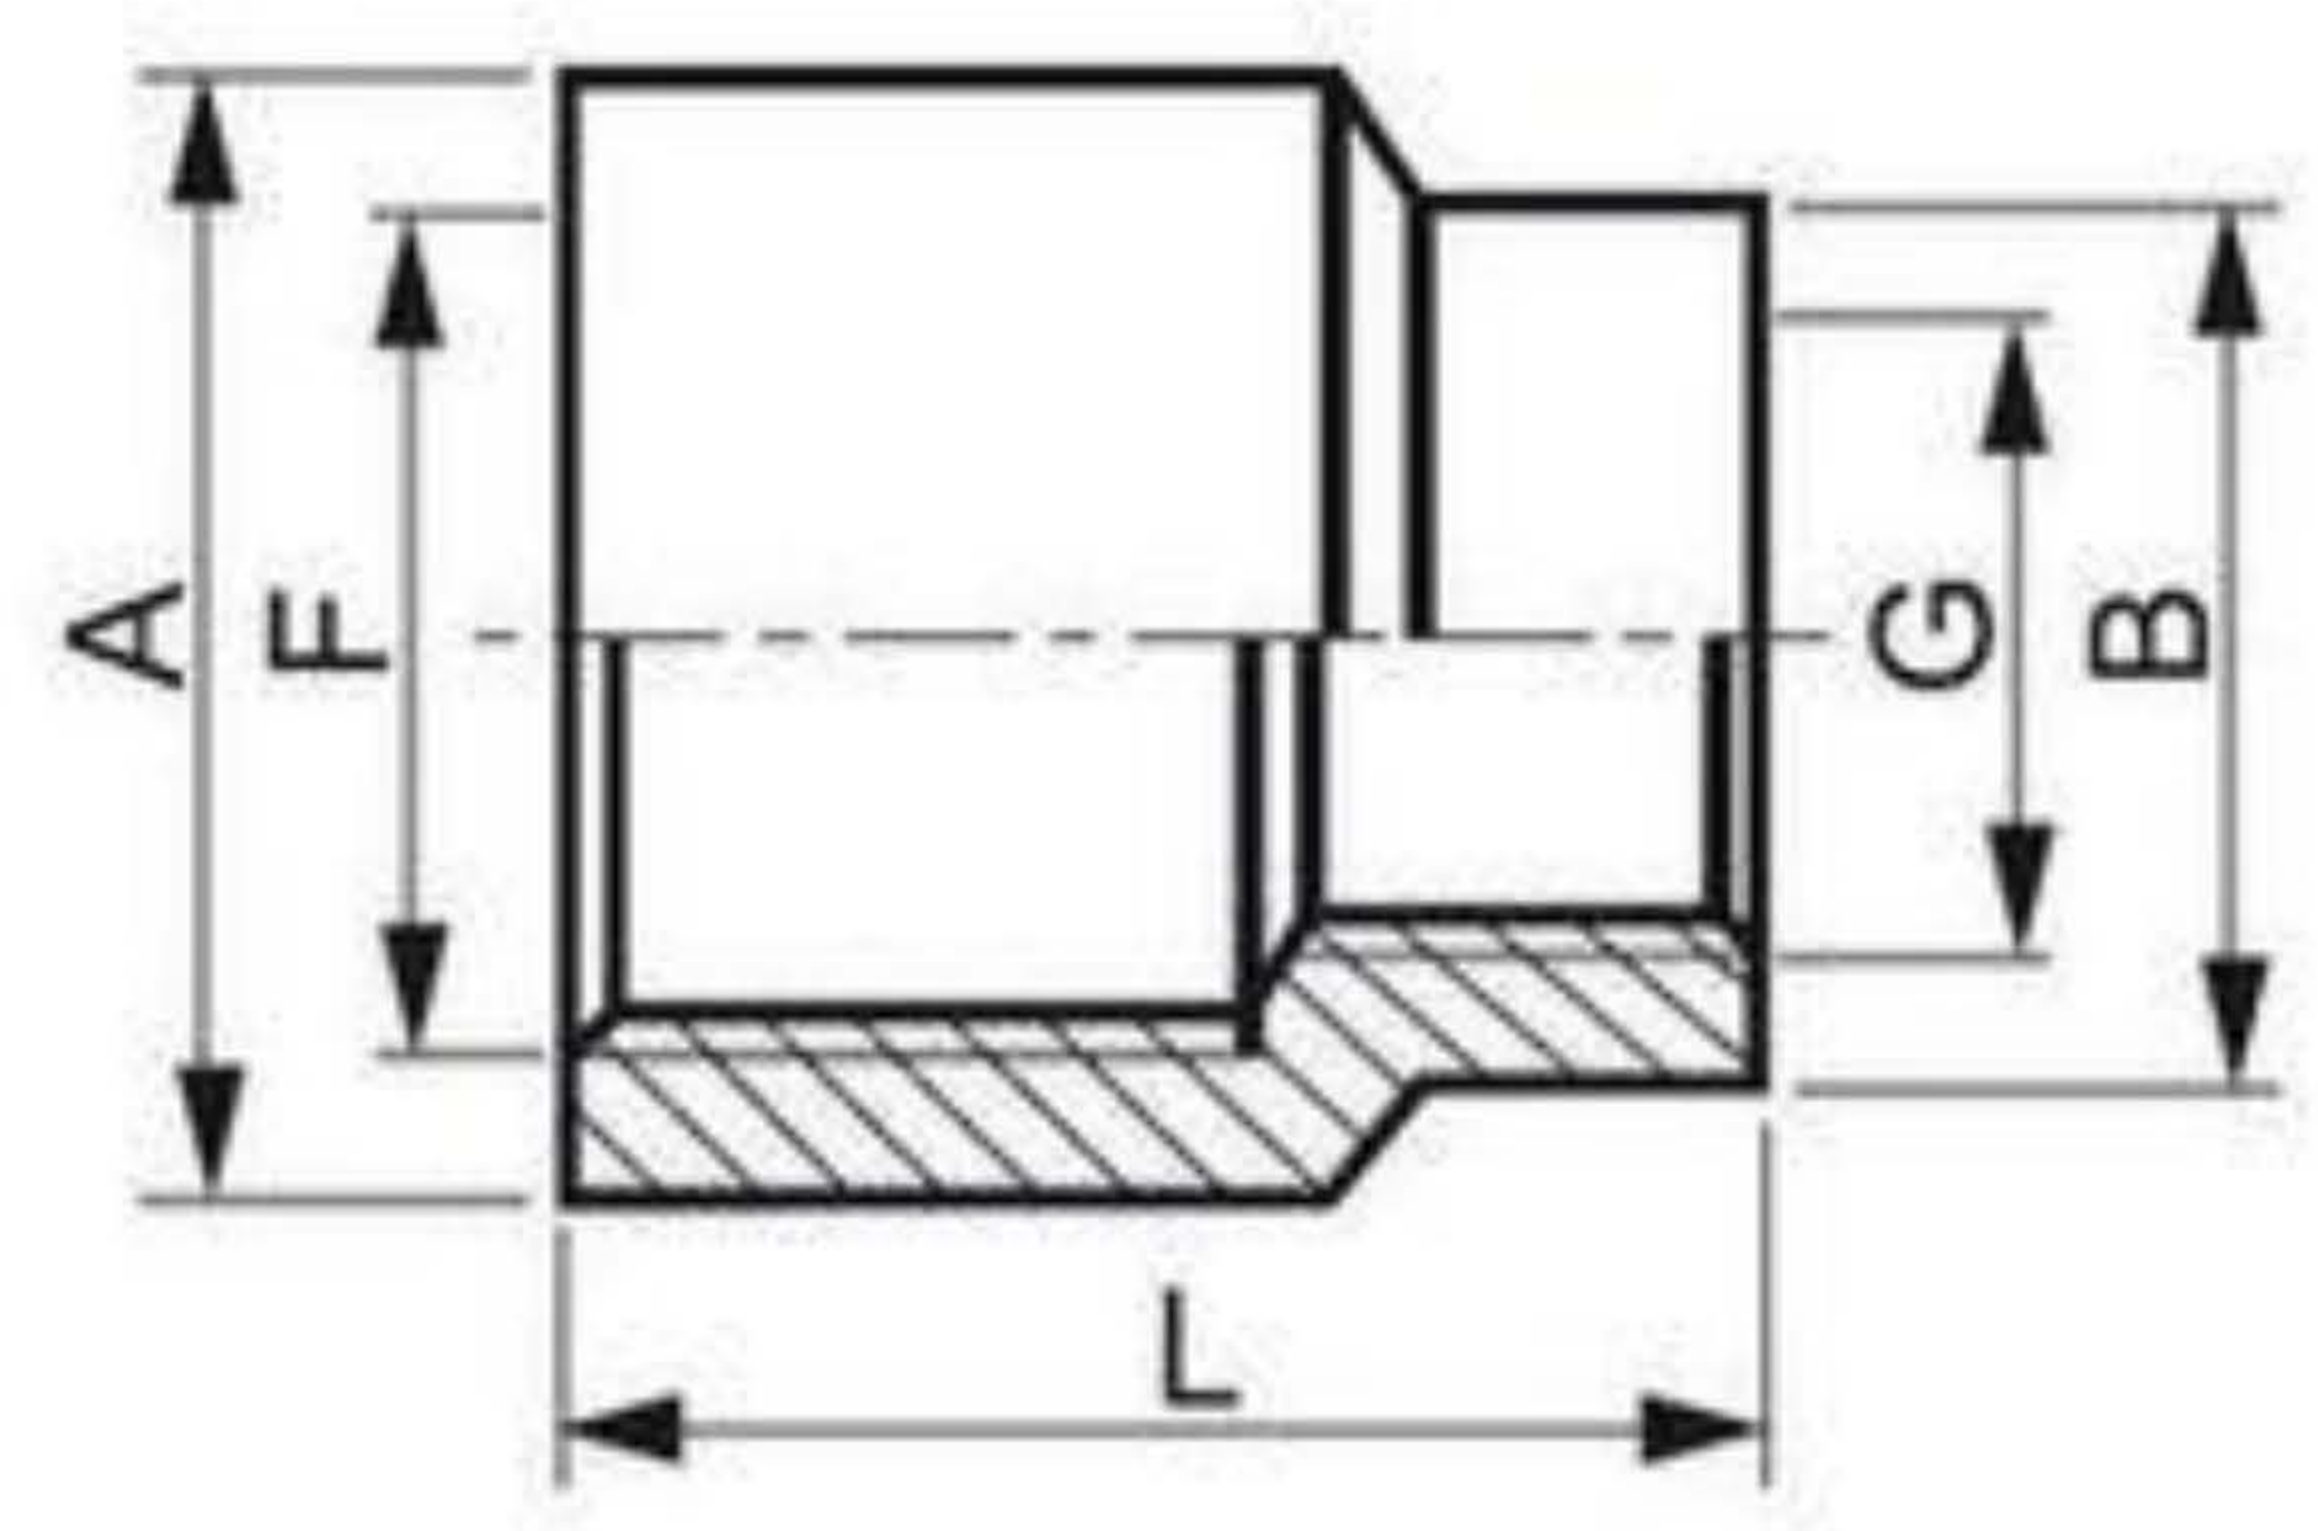

DN	F	G	L	A	B	Poids (Kg)	Raccordement
8-5	1/4"	1/8"	27	18	14	0,025	Gaz/BSP
12-5	3/8"	1/8"	30	22	16	0,045	Gaz/BSP
12-8	3/8"	1/4"	30	22	17	0,045	Gaz/BSP
15-5	1/2"	1/8"	36	25	16	0,07	Gaz/BSP
15-8	1/2"	1/4"	36	25	17	0,07	Gaz/BSP
15-12	1/2"	3/8"	36	25	21	0,07	Gaz/BSP
20-5	3/4"	1/8"	38	32	16	0,13	Gaz/BSP
20-8	3/4"	1/4"	38	32	17	0,13	Gaz/BSP
20-12	3/4"	3/8"	38	32	21	0,12	Gaz/BSP
20-15	3/4"	1/2"	38	32	27	0,11	Gaz/BSP
25-8	1"	1/4"	43	40	16	0,165	Gaz/BSP
25-12	1"	3/8"	43	40	21	0,165	Gaz/BSP
25-15	1"	1/2"	43	40	27	0,15	Gaz/BSP
25-20	1"	3/4"	43	40	33	0,15	Gaz/BSP
32-12	1"1/4	3/8"	45	50	21	0,255	Gaz/BSP
32-15	1"1/4	1/2"	45	50	27	0,255	Gaz/BSP