


Réductions

Femelles / Mâles 316L usinés

DIN 2986

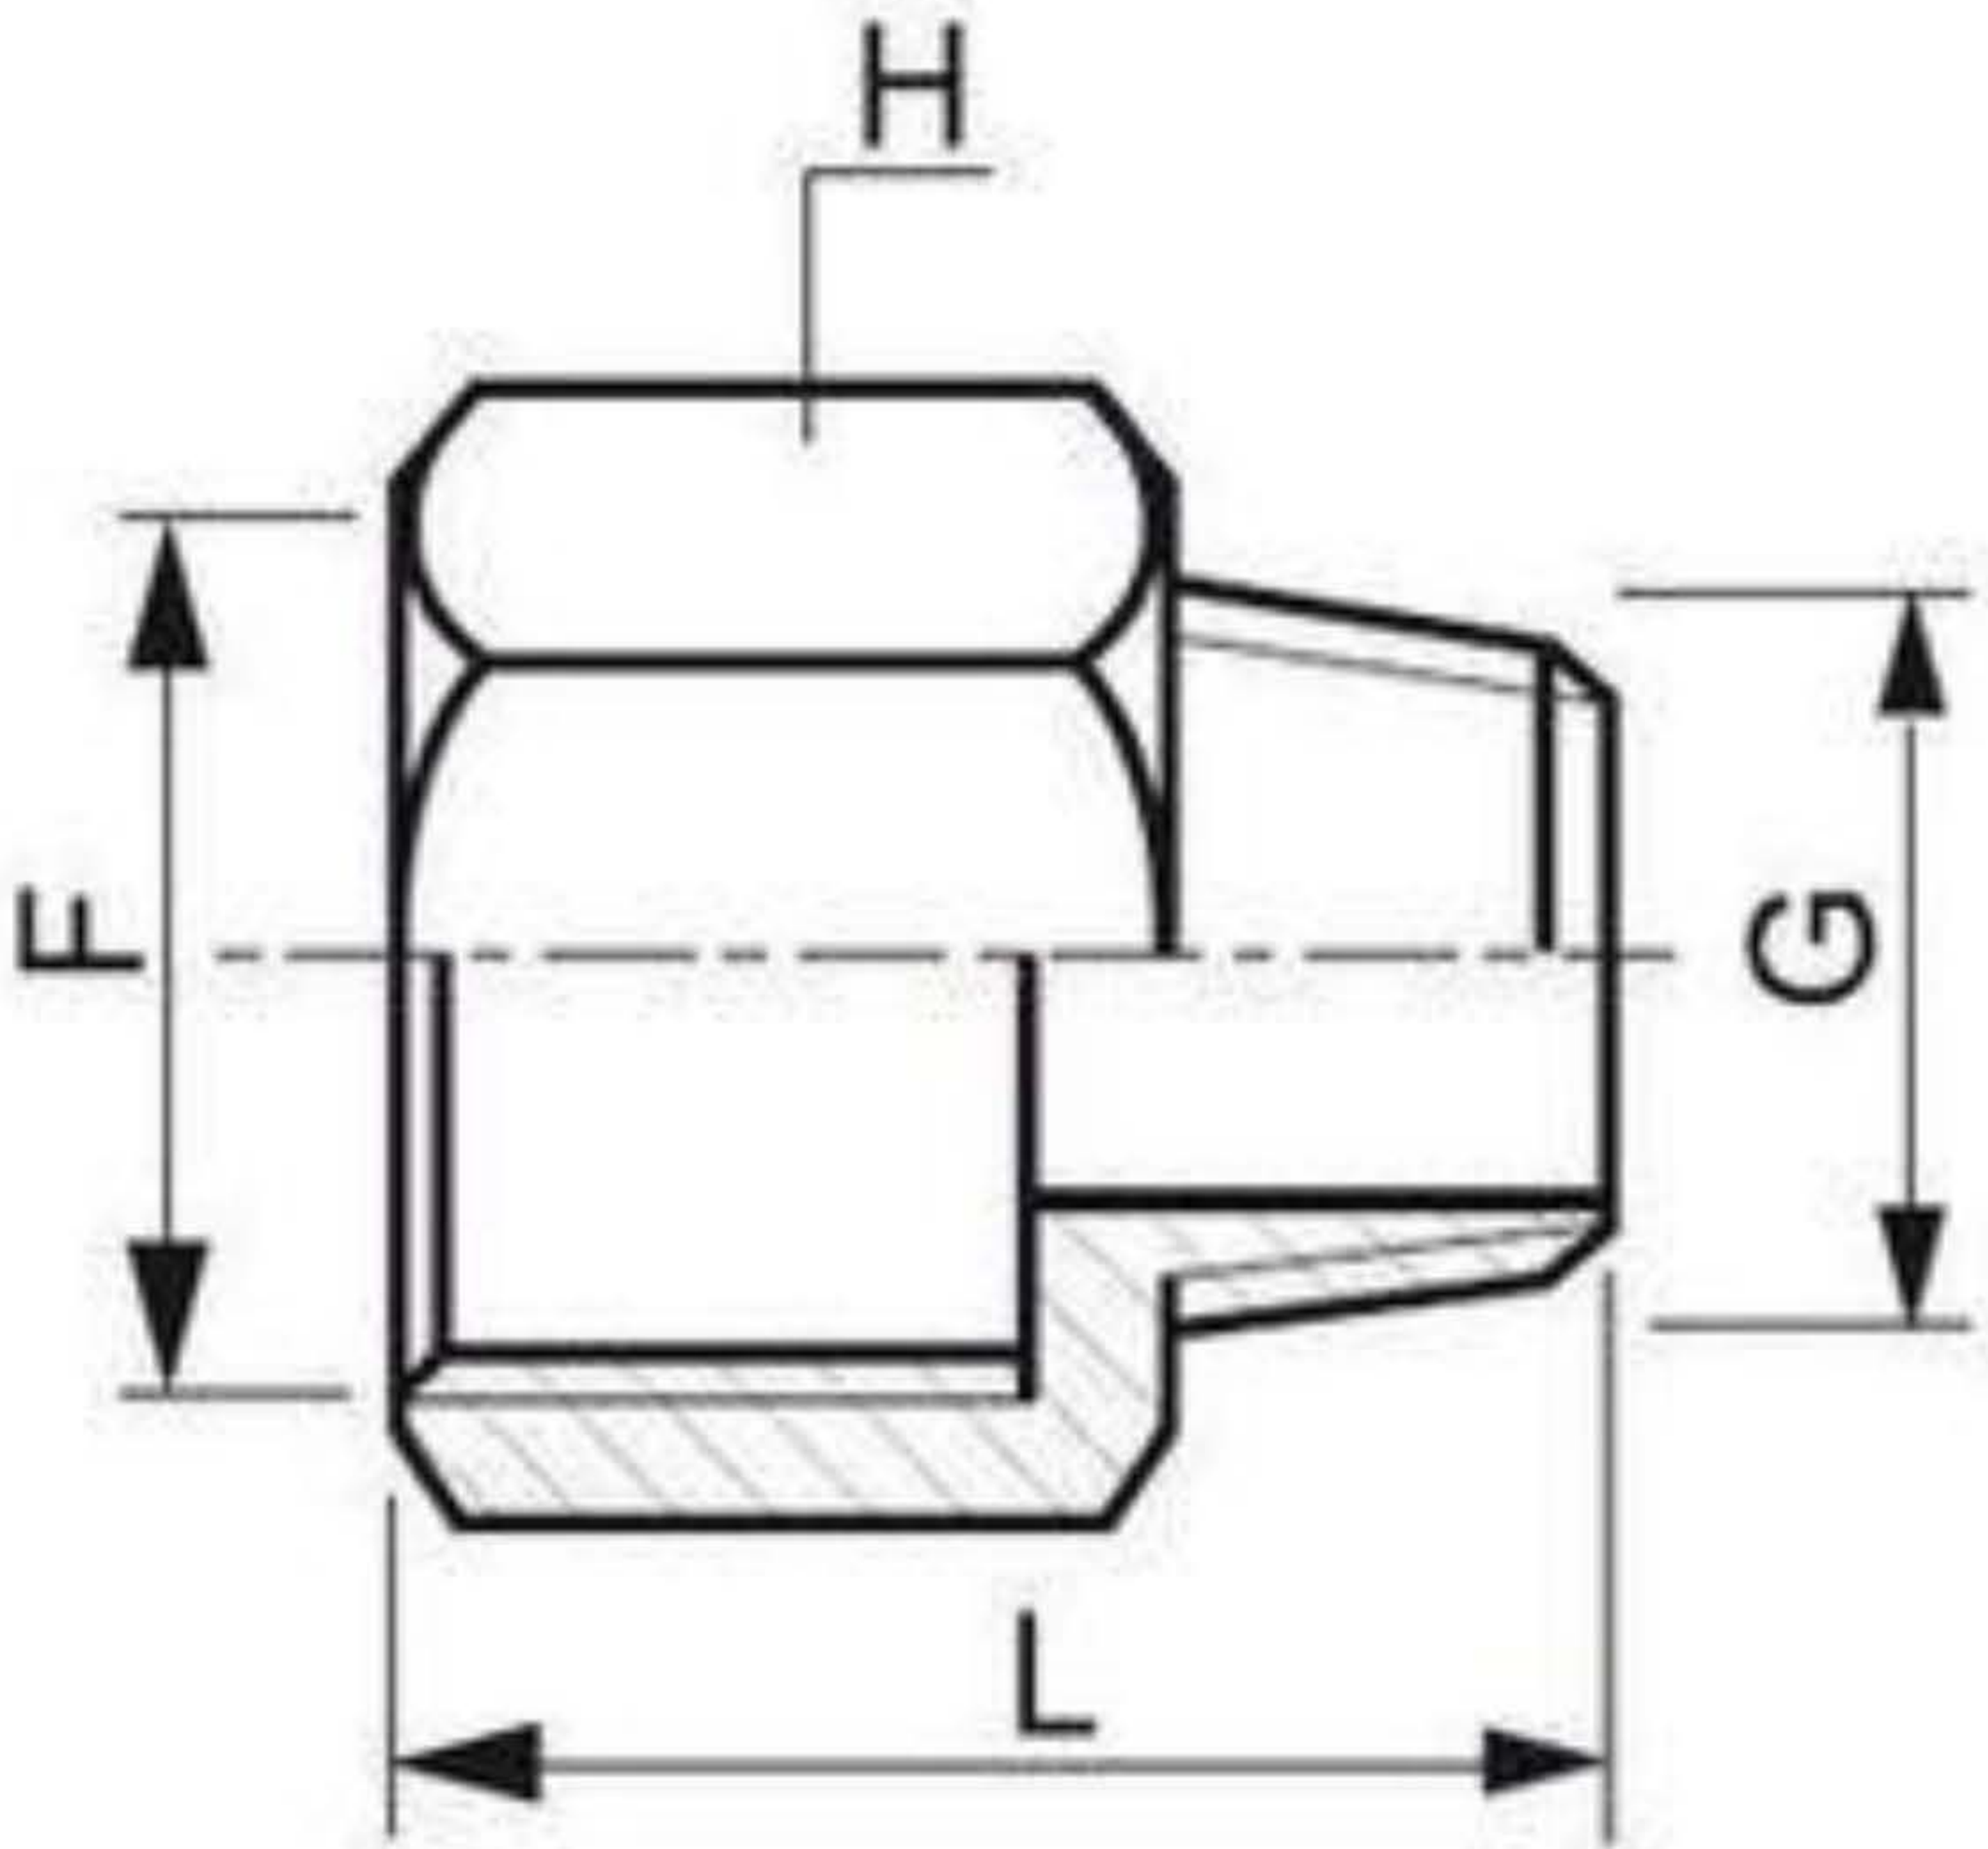

DN	F	G	L	H	Poids (Kg)	Raccordement
8-5	1/4"	1/8"	25	17	0,02	Gaz/BSP
12-5	3/8"	1/8"	27	21	0,04	Gaz/BSP
12-8	3/8"	1/4"	28	21	0,03	Gaz/BSP
15-5	1/2"	1/8"	30	24	0,045	Gaz/BSP
15-8	1/2"	1/4"	31	24	0,045	Gaz/BSP
15-12	1/2"	3/8"	32	24	0,045	Gaz/BSP
20-8	3/4"	1/4"	35	30	0,075	Gaz/BSP
20-12	3/4"	3/8"	35	30	0,075	Gaz/BSP
20-15	3/4"	1/2"	36	30	0,07	Gaz/BSP
25-12	1"	3/8"	37	36	0,1	Gaz/BSP
25-15	1"	1/2"	39	36	0,105	Gaz/BSP
25-20	1"	3/4"	43	36	0,105	Gaz/BSP
32-20	1"1/4	3/4"	46	46	0,215	Gaz/BSP
32-25	1"1/4	1"	49	46	0,175	Gaz/BSP
40-25	1"1/2	1"	49	55	0,335	Gaz/BSP
40-32	1"1/2	1"1/4	50	55	0,3	Gaz/BSP