


1281

**Filtre horizontal d'épuration d'eau
avec brides PN6/PN16**
Horizontal intake water strainer
with PN6/PN16 flanges

Filtre homologué RINA MAC
RINA MAC certificate

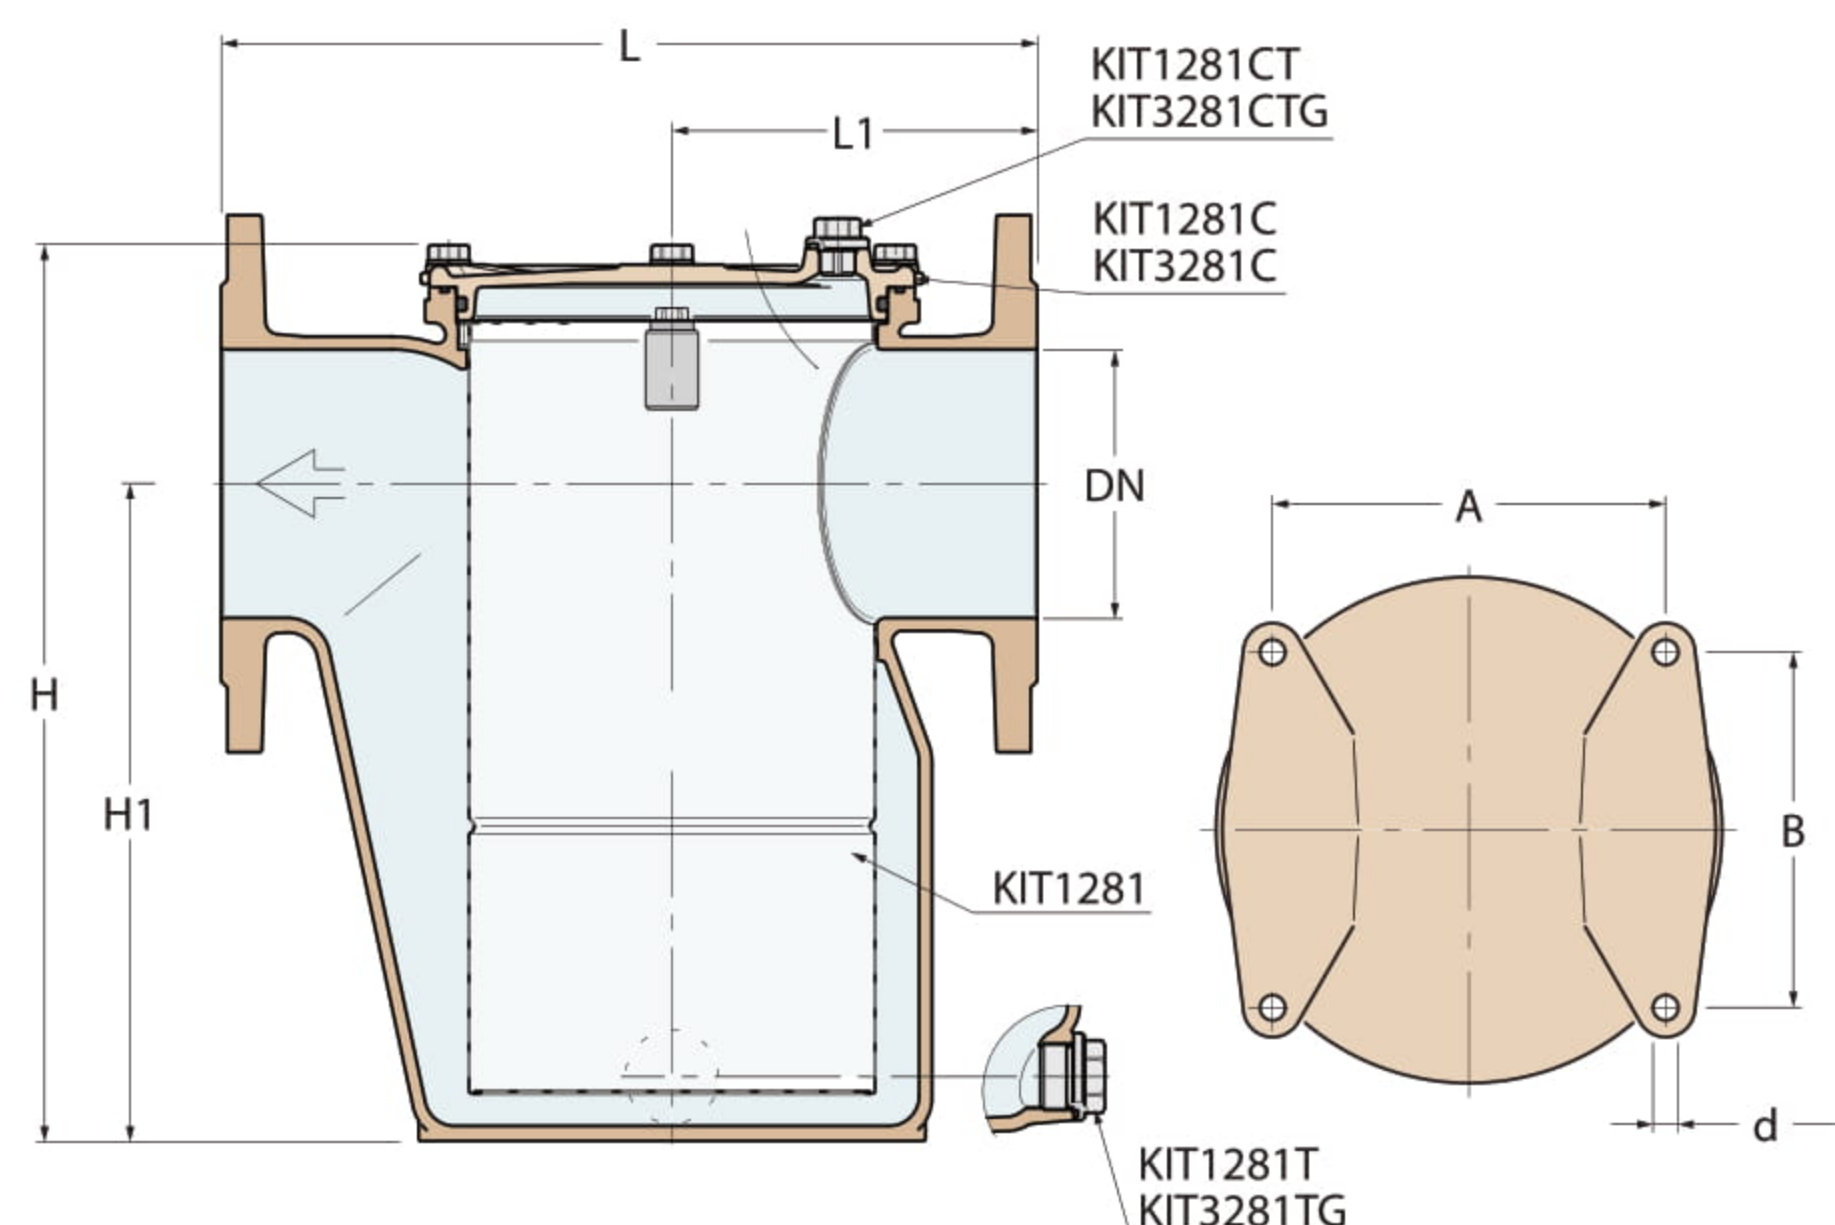

* Avec bride PN16
With flange PN16

1281	10900	14500	21000	26000	39000	50000	80000	138500
Weight (gr)*								
3281	3750	4950	7150	8840	13260	17000	27200	47100
Weight (gr)*								
d	8.5	8.5	8.5	8.5	8.5	8.5	10.5	10.5
A	108	122	142	166	188	214	260	320
B	108	122	132	150	170	210	240	280
H	225	273	302	350	430	468	575	685
H1	147	184.5	205	243	306	325.5	400	485
L1	102	117	130	150	170	190	215	255
L	225	260	290	338	380	425	500	600
DN	50	65	80	100	125	150	200	250




BRONZE
Bronze

3281



ALUMINIUM ANODISE NOIR
Black anodized aluminium

DIAGRAMME DE DEBIT-PERTE DE PRESSION
Flow rate - loss of pressure diagram

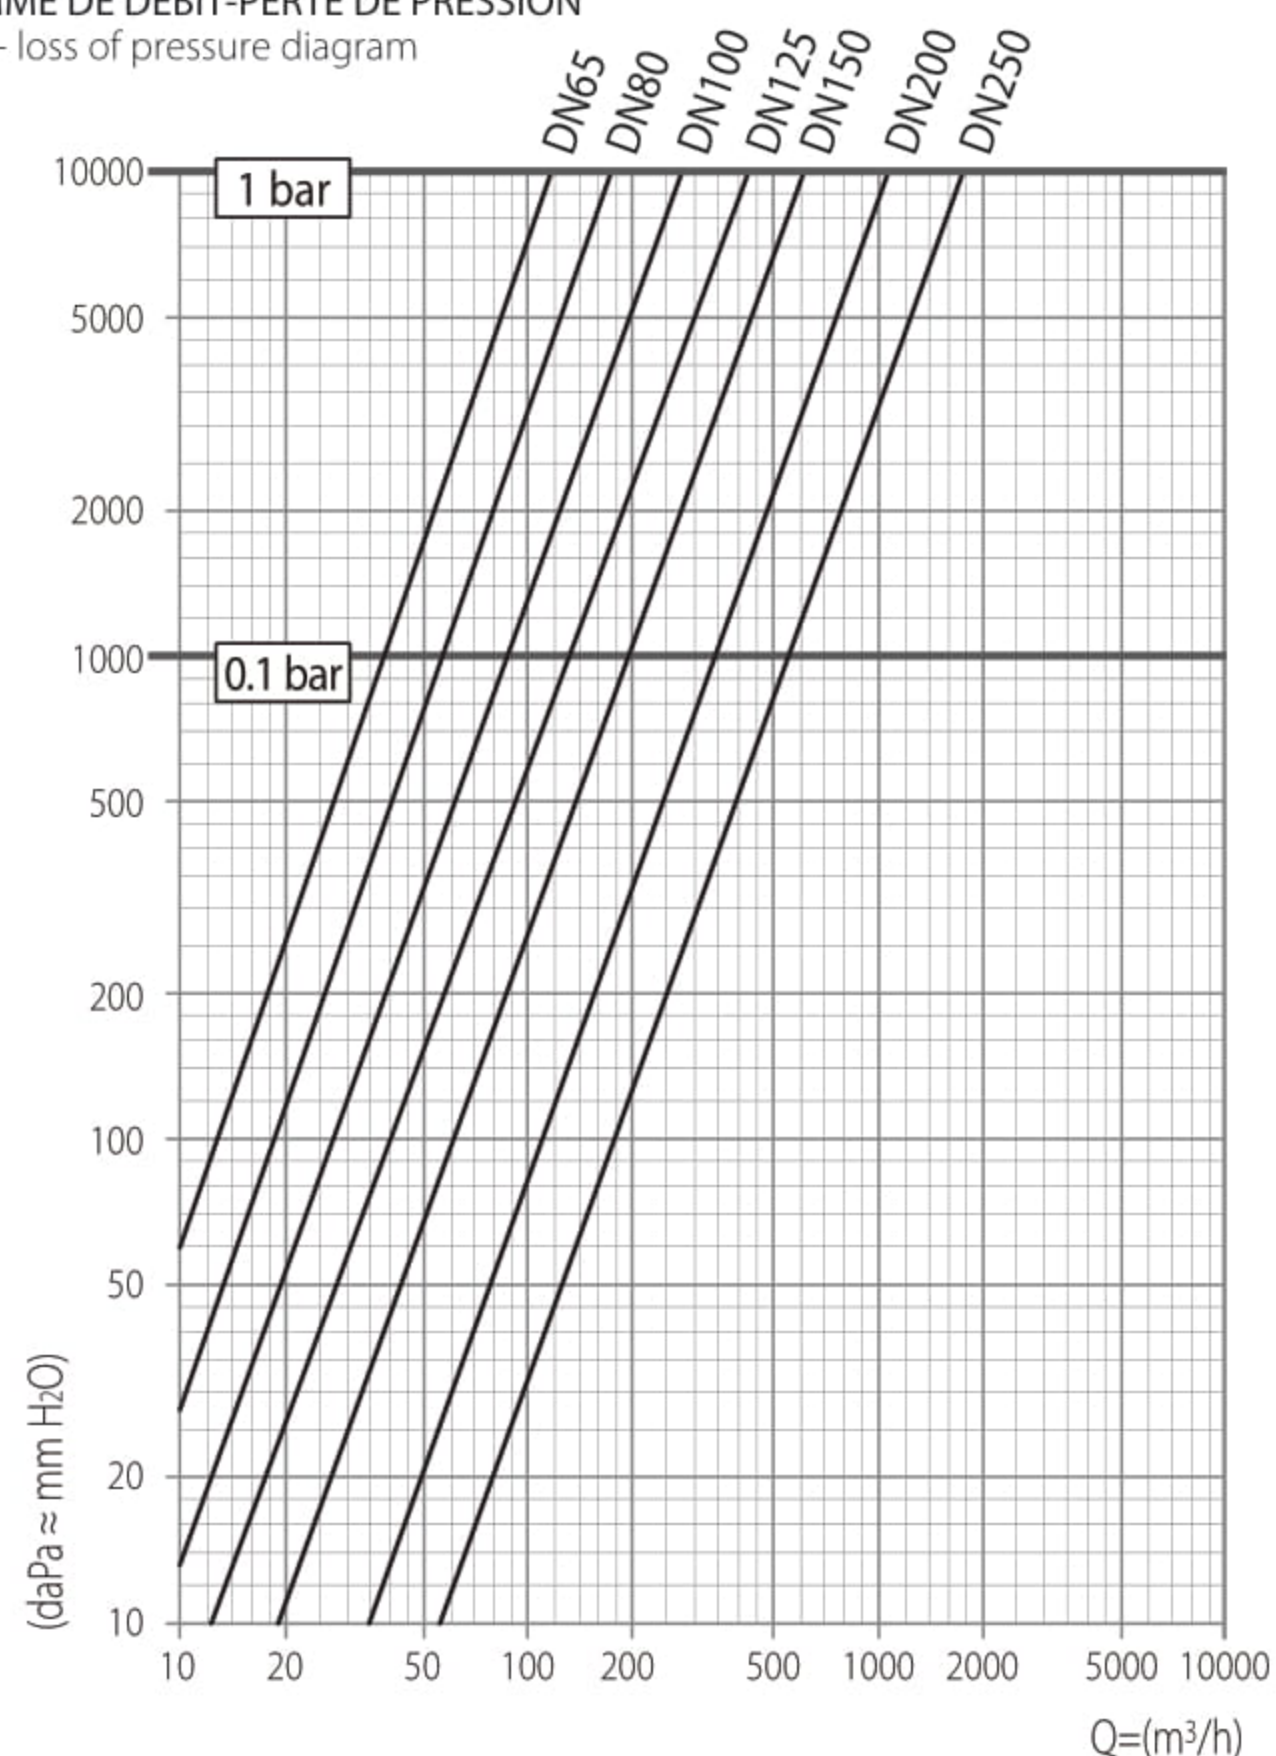

Corps bronze/aluminium anodisé noir
Bronze / Black anodized aluminium casing

Panier inox AISI 316L
AISI 316L stainless steel inside filter

couvercle bronze/aluminium anodisé noir
Bronze / Black anodized aluminium cover

Joint néoprène
Neoprene o-ring

DN	0.1 bar	1 bar
65	37000	117000
80	56100	177200
100	88000	277000
125	136800	432700
150	197000	623000
200	350000	1108000
250	564500	1786000

CAPACITE DE DEBIT A TRAVERS UN FILTRE PROPRE - lt/h
Flow-rate capacity through the clean filter - lt/h