


1340

Bride M PN6 / PN16

PN6 / PN16 flange with male thread

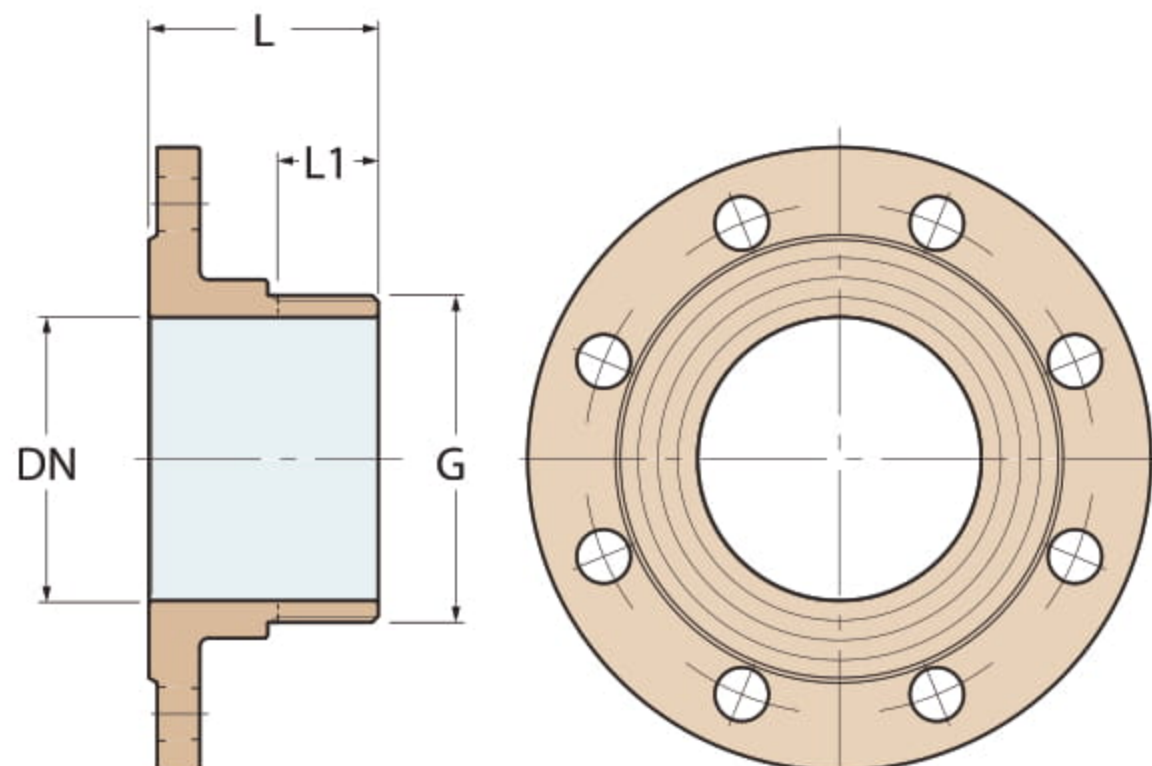

FILETAGE / THREAD :
G = ISO 228/1 (BS 2779)

1340									
Weight (PN6) (gr)	730	1100	1270	1600	2160	3150	4220	5590	6680
Weight (PN16) (gr)	1060	1700	1910	2520	3400	3980	5240	6980	8530
1340N									
Weight (PN6) (gr)	700	1050	1205	1530	2050	2930	4020	5370	6380
Weight (PN16) (gr)	1015	1620	1820	2430	3300	3760	4960	6640	8250
3340									
Weight (PN6) (gr)	220	330	380	480	650	945	1265	1680	2010
Weight (PN16) (gr)	320	510	575	755	1020	1195	1570	2095	2560
L (PN6)	49	55	56	59	66	71	78	86	88
L (PN16)	52	57	58	62	69	74	81	89	91
L1	20	22	23	26	30	33	39	44	44
DN	25	32	40	50	65	80	100	125	150
G	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"	5"	6"



BRONZE
Bronze

1340N



LAITON NICKELE
Nickel-plated brass

3340



ALUMINIUM ANODISE NOIR
Black anodized aluminium