
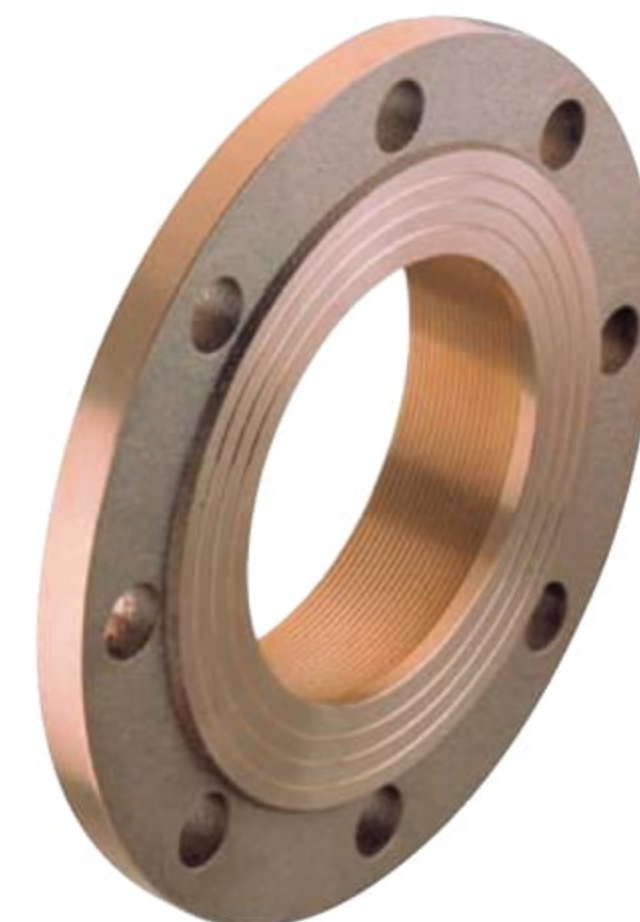


1350

Bride PN6 / PN16 F

PN6 / PN16 flange with female thread

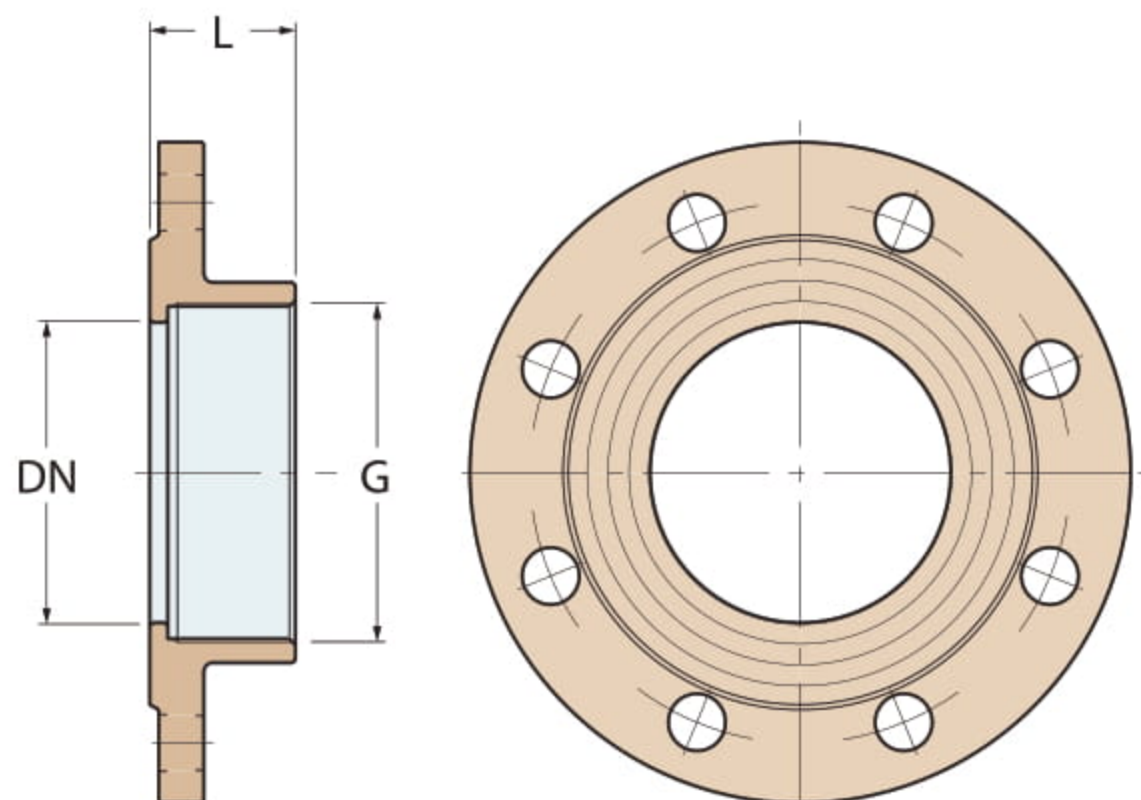

FILETAGE / THREAD : G
= EN 10226/1 (BS 21)

1350	■	■	■	■	■	■	■	■	■	■
Weight (PN6) (gr)	640	970	1120	1390	1865	2600	3400	4700	5210	-
Weight (PN16) (gr)	1100	1530	1700	2320	3100	3450	4400	5900	7200	9800
1350N	■	■	■	■	■	■	■	■	■	■
Weight (PN6) (gr)	610	920	1060	1320	1755	2380	3200	4520	4910	-
Weight (PN16) (gr)	1050	1450	1610	2230	3000	3230	4120	5560	6920	9800
3350	■	■	■	■	■	■	■	■	■	■
Weight (PN6) (gr)	190	290	340	420	560	780	1020	1410	1565	-
Weight (PN16) (gr)	330	460	510	700	930	1035	1320	1770	2160	2940
L	27	29	29	34	38	42	49	52	53	54
DN	25	32	40	50	65	80	100	125	150	200
G	1"	1"1/4	1"1/2	2"	2"1/2	3"	4"	5"	6"	M216x3.5

BRONZE
Bronze ■

1350N



LAITON NICKELE
Nickel-plated brass ■

3350



ALUMINIUM ANODISE NOIR
Black anodized aluminium ■