


2220

Vanne "antiblocage"
avec brides PN6/PN16
"Non stick" valve with
PN6/PN16 flanges

Homologation RINA
RINA validated

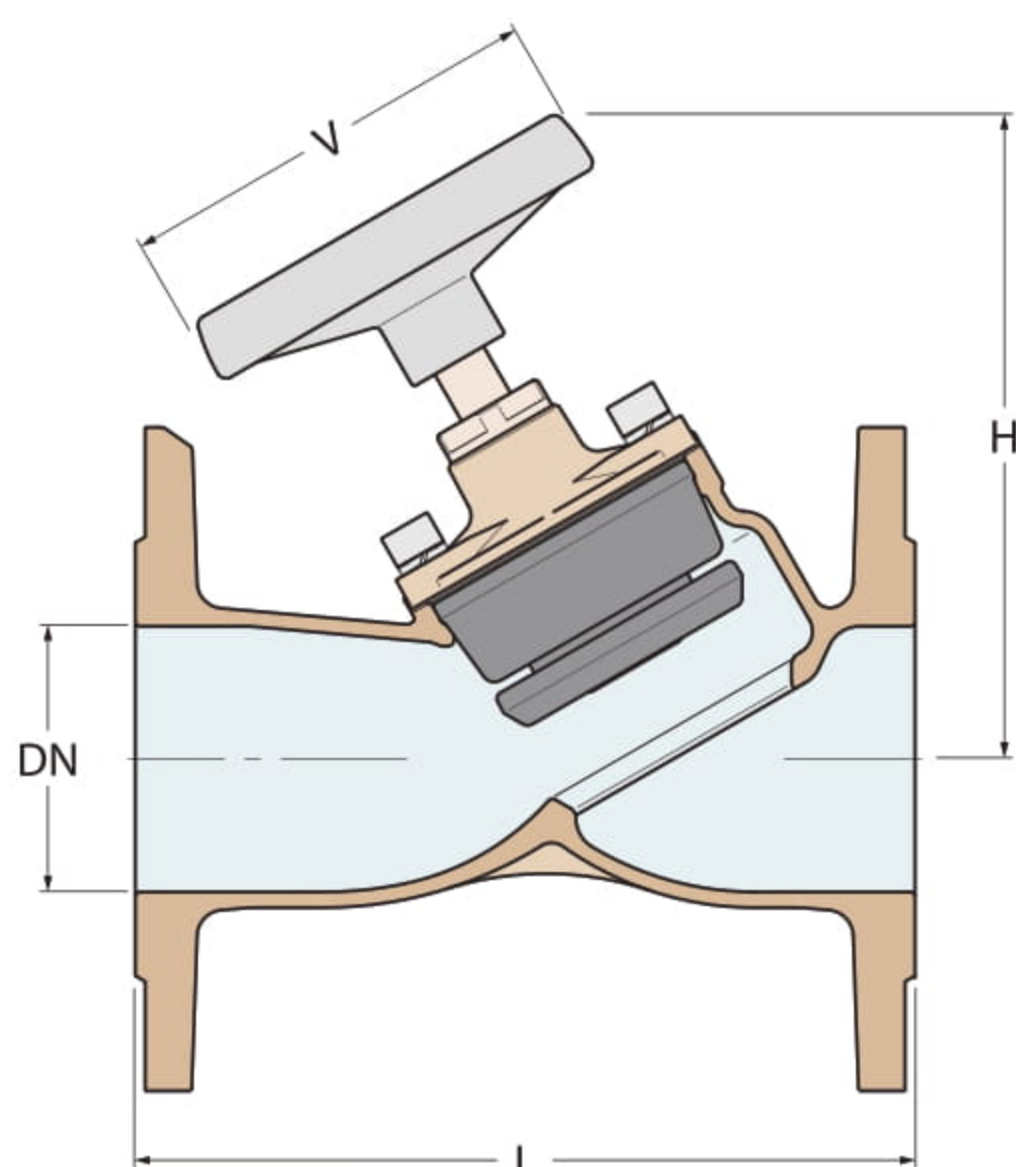


* AVEC BRIDES PN16
With flange PN16

2220				
Weight (gr)*	10600	12000	16500	22200
V	125	125	160	160
H	178	181	222	234
L	218	235	270	310
DN	65	80	100	125



BRONZE
Bronze

DIAGRAMME DE DEBIT-PERTE DE PRESSION
Flow rate - loss of pressure diagram

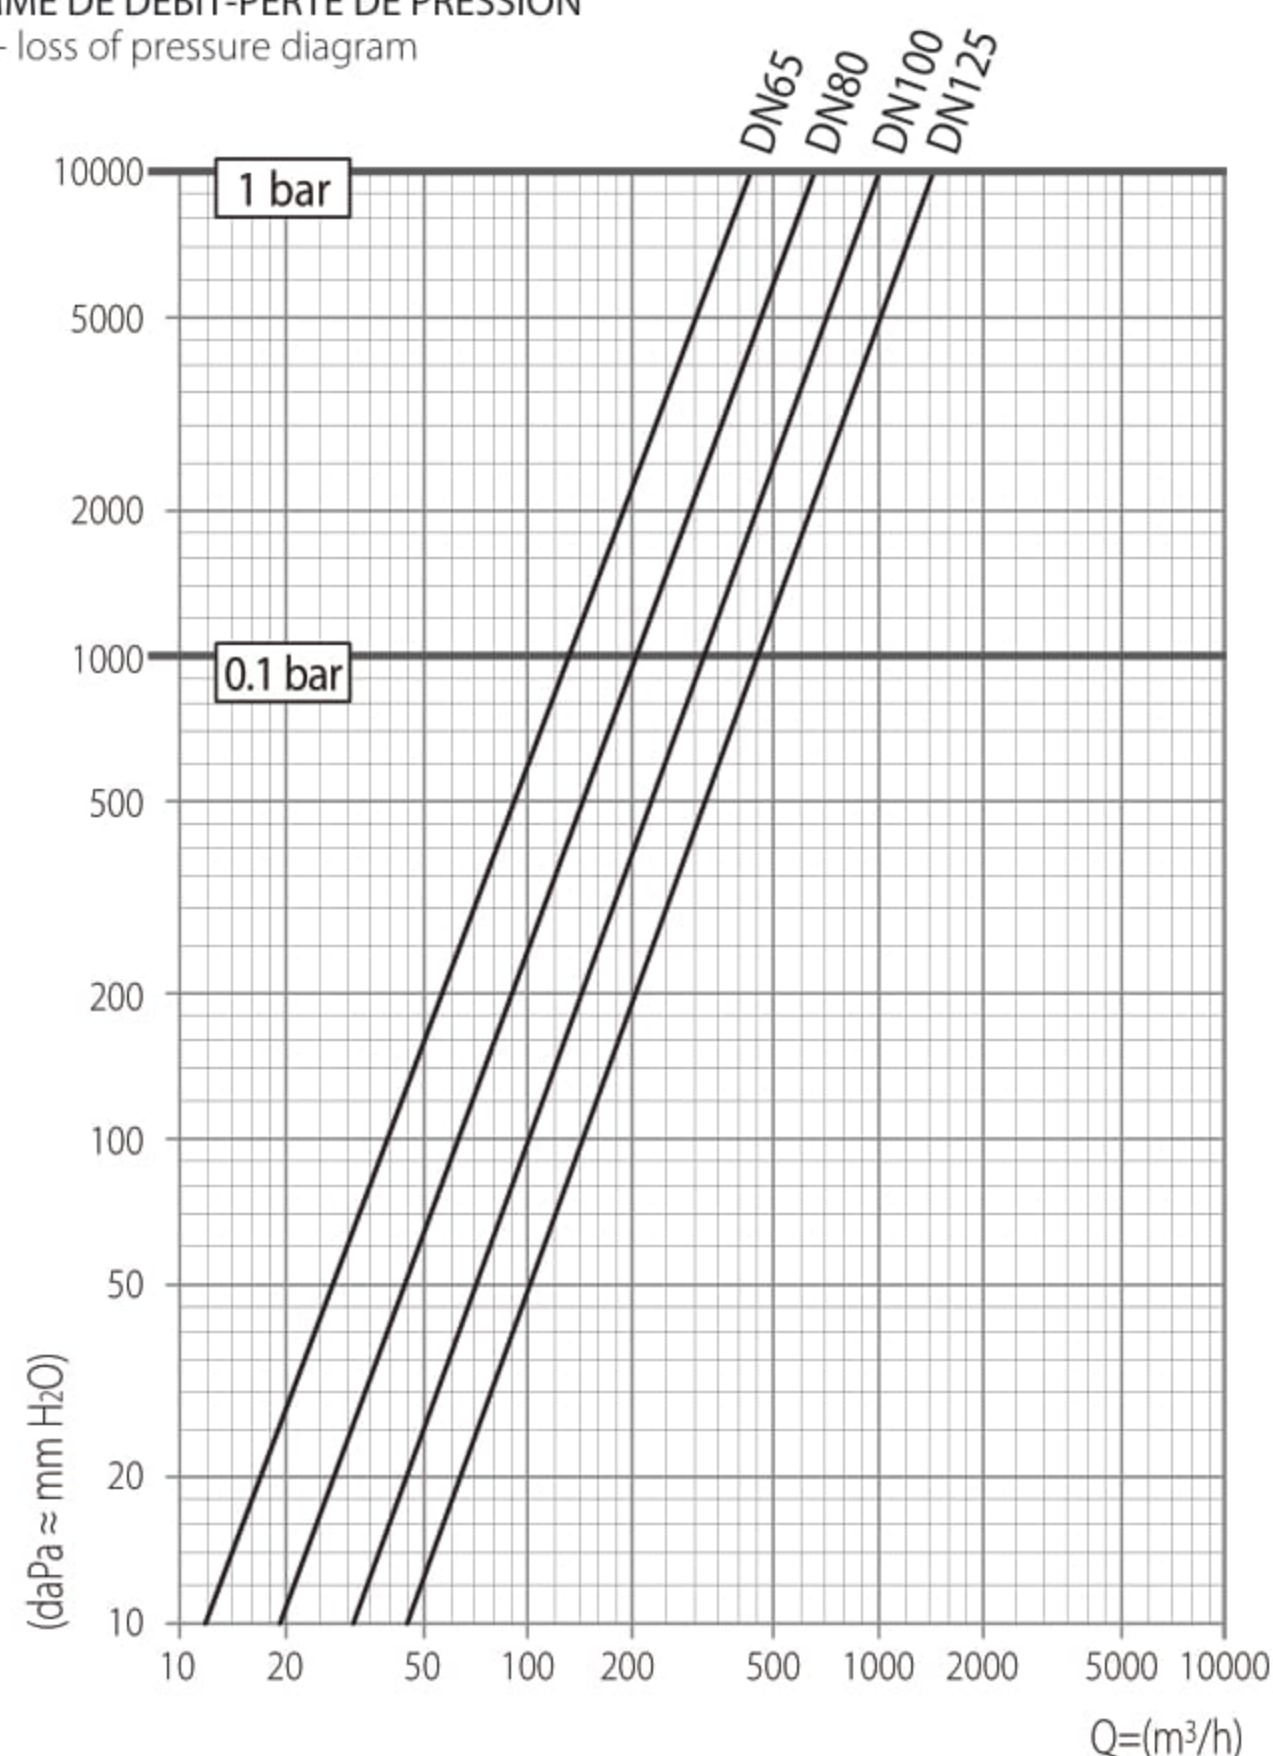

CORPS EN BRONZE
Bronze body

GARNISON NEOPRENE
Neoprene gaskets

VIS EN ACIER INOX
Stainless steel screws

VOLANT THERMOPLASTIQUE
Thermoplastic handwheel

DN	0.1 bar	1 bar
65	135800	429500
80	207700	656700
100	324500	1026100
125	465000	1410000

DEBIT D'EAU- lt/h
Flow-rate capacity - lt/h