

2250

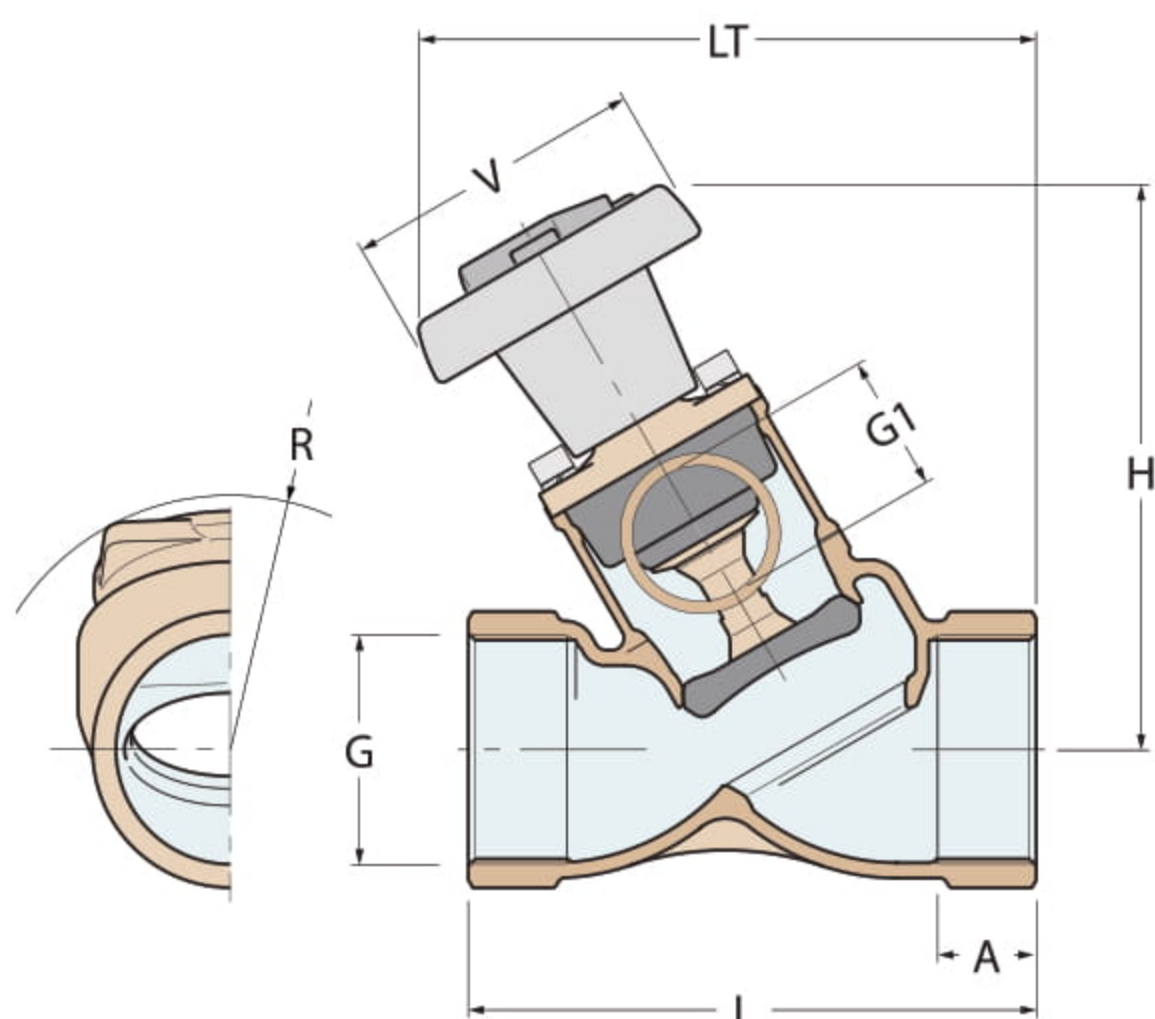
**Vanne prise eau de mer "antiblocage"  
filetée F-F-F et indicateur de position**Double intake "non stick" valve F-F-F  
with position indicator**Homologation RINA**

RINA validated

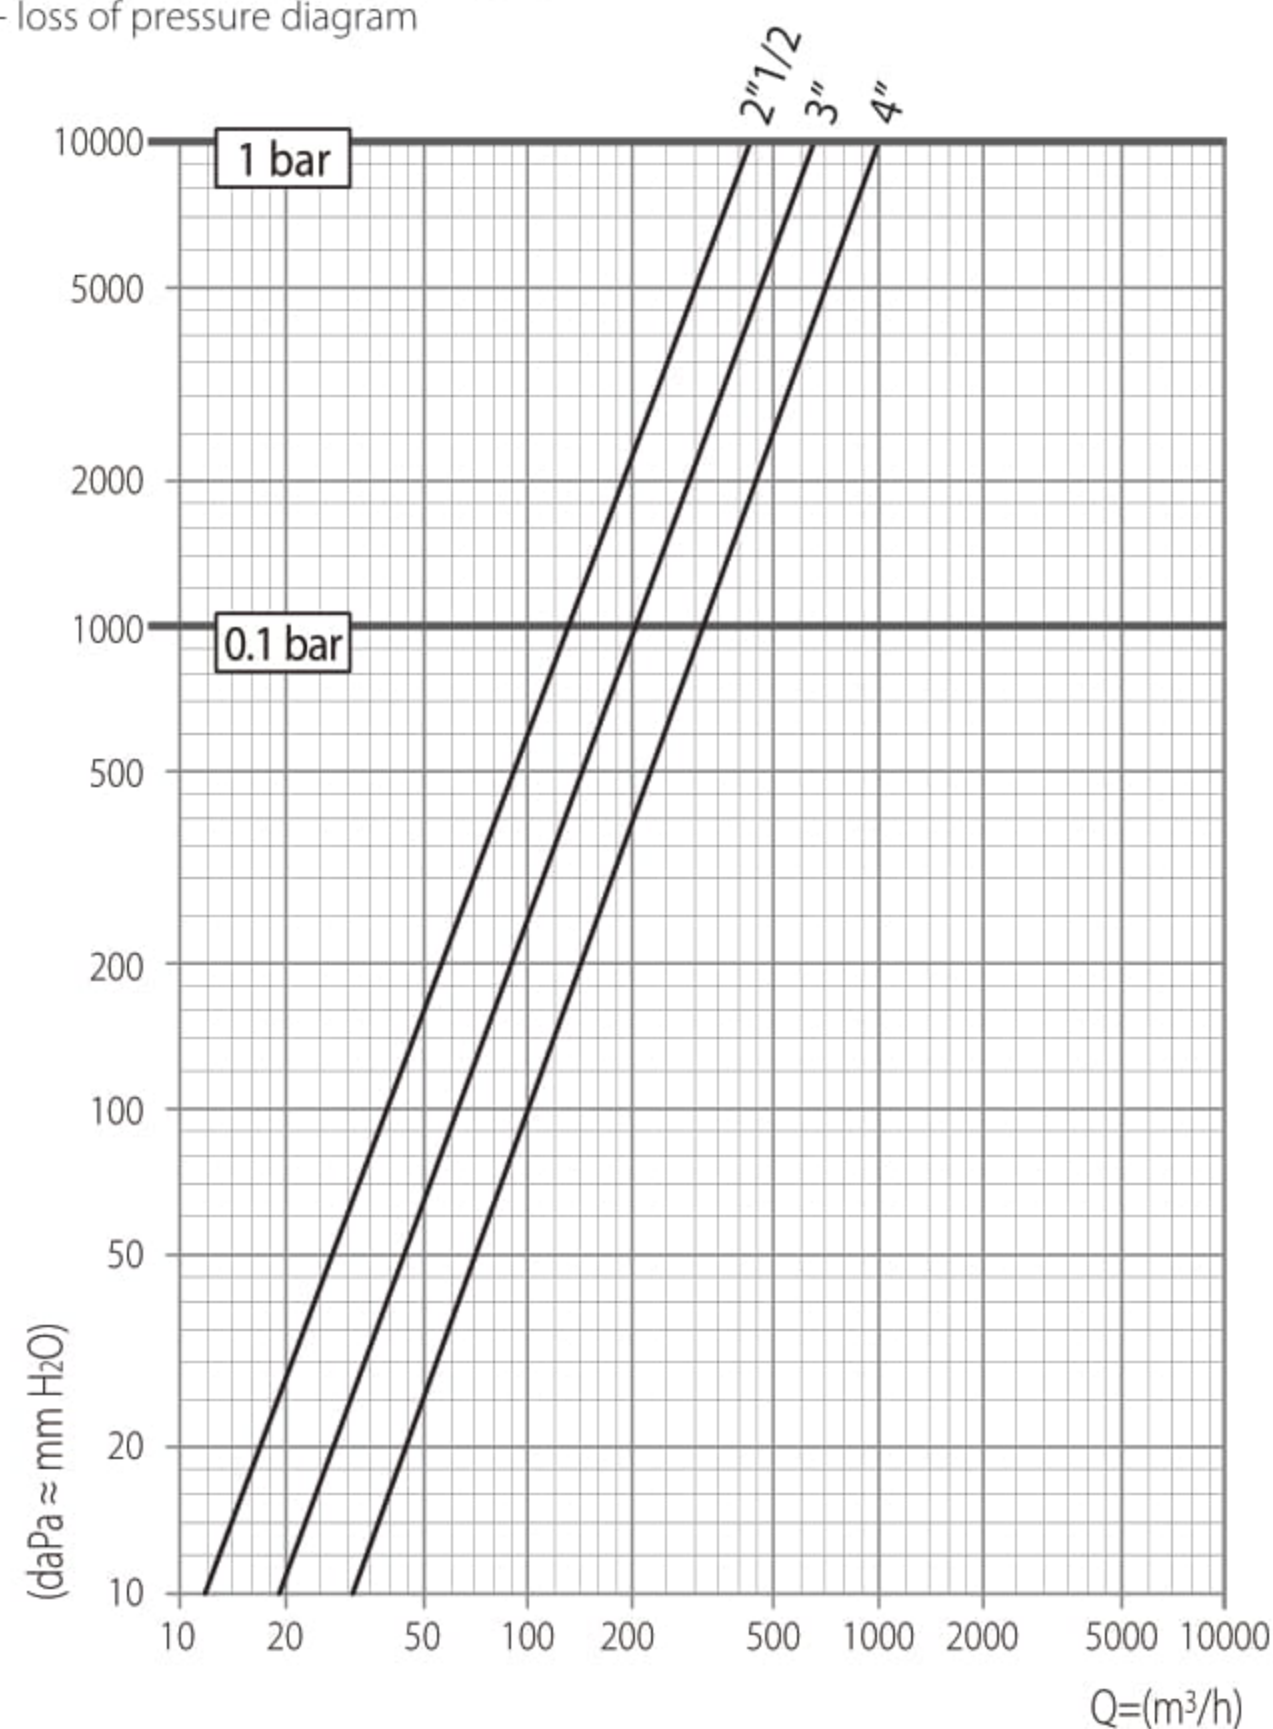
**Conforme alla norma**

Compliant with

UNI EN ISO 9093-1

FILETAGE/ THREAD :  
G - G1 = EN 10226/1 (BS 21)BRONZE  
Bronze**2250**

| Weight (gr) | 7400  | 8250 | 13000 |
|-------------|-------|------|-------|
| R           | 98    | 106  | 120   |
| LT          | 244   | 246  | 291   |
| V           | 125   | 125  | 160   |
| H           | 233   | 236  | 274   |
| L           | 195   | 206  | 245   |
| A           | 30.2  | 33.3 | 35.8  |
| G1          | 1"1/2 | 2"   | 2"1/2 |
| G           | 2"1/2 | 3"   | 4"    |

**DIAGRAMME DE DEBIT-PERTE DE PRESSION**  
Flow rate - loss of pressure diagram**CORPS EN BRONZE**

Bronze body

**GARNISON NEOPRENE**

Neoprene gaskets

**VIS EN ACIER INOX**

Stainless steel screws

**VOLANT THERMOPLASTIQUE**

Thermoplastic handwheel

| G     | 0.1 bar | 1 bar   |
|-------|---------|---------|
| 2"1/2 | 135800  | 429500  |
| 3"    | 207700  | 656700  |
| 4"    | 324500  | 1026100 |

**DEBIT D'EAU- lt/h**

Flow-rate capacity - lt/h