


2260

**Vanne “antiblocage ALEX”
filetée passage total**
Threaded “non stick” valve “Alex” full
flow

Homologation RINA
RINA validated

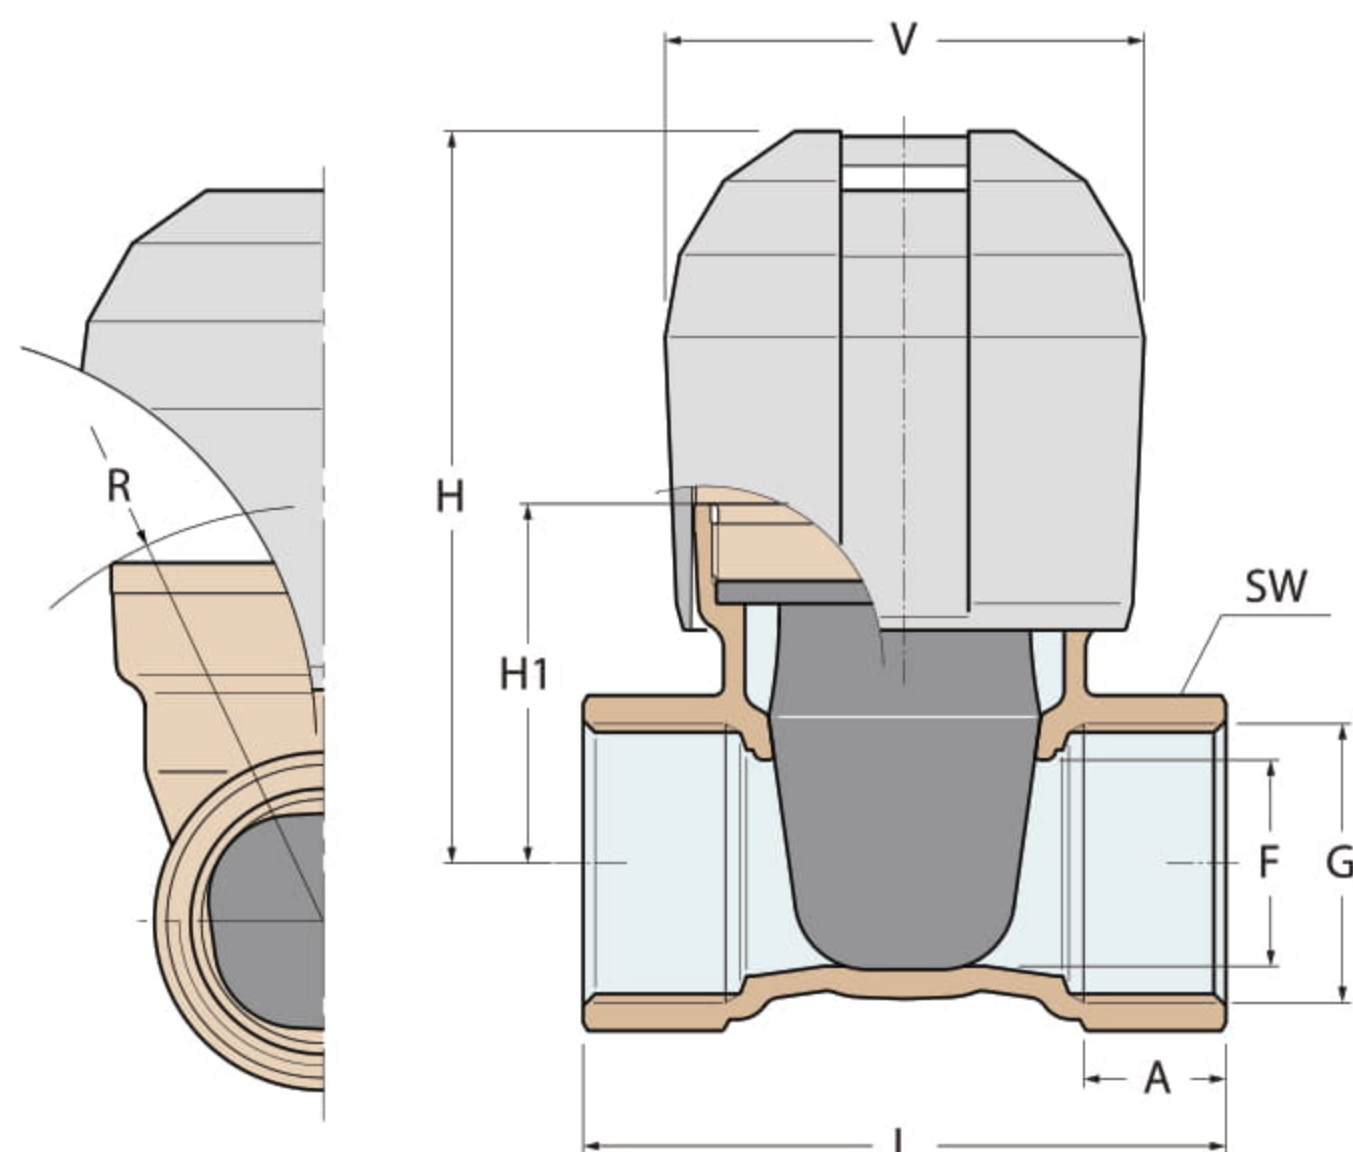


FILETAGE/THREAD :
G = EN 10226/1 (BS 21)

2260							
Weight (gr)	490	480	650	840	1250	1500	2500
SW	25	25	31	38	47	54	67
R	43	43	50	54	63	70	80
H1	36	36	43	47	54	61	72
F	15	15	20	25	33	38	48
A	11.4	15	16.3	19.1	21.4	21.4	25.7
V	53	53	58	63	72	78	90
L	67	67	73	84	97	103	124
H	76	76	85	94	110	118	139
G	3/8"	1/2"	3/4"	1"	1"1/4	1"1/2	2"



BRONZE
Bronze

DIAGRAMME DE DEBIT-PERTE DE PRESSION
Flow rate - loss of pressure diagram

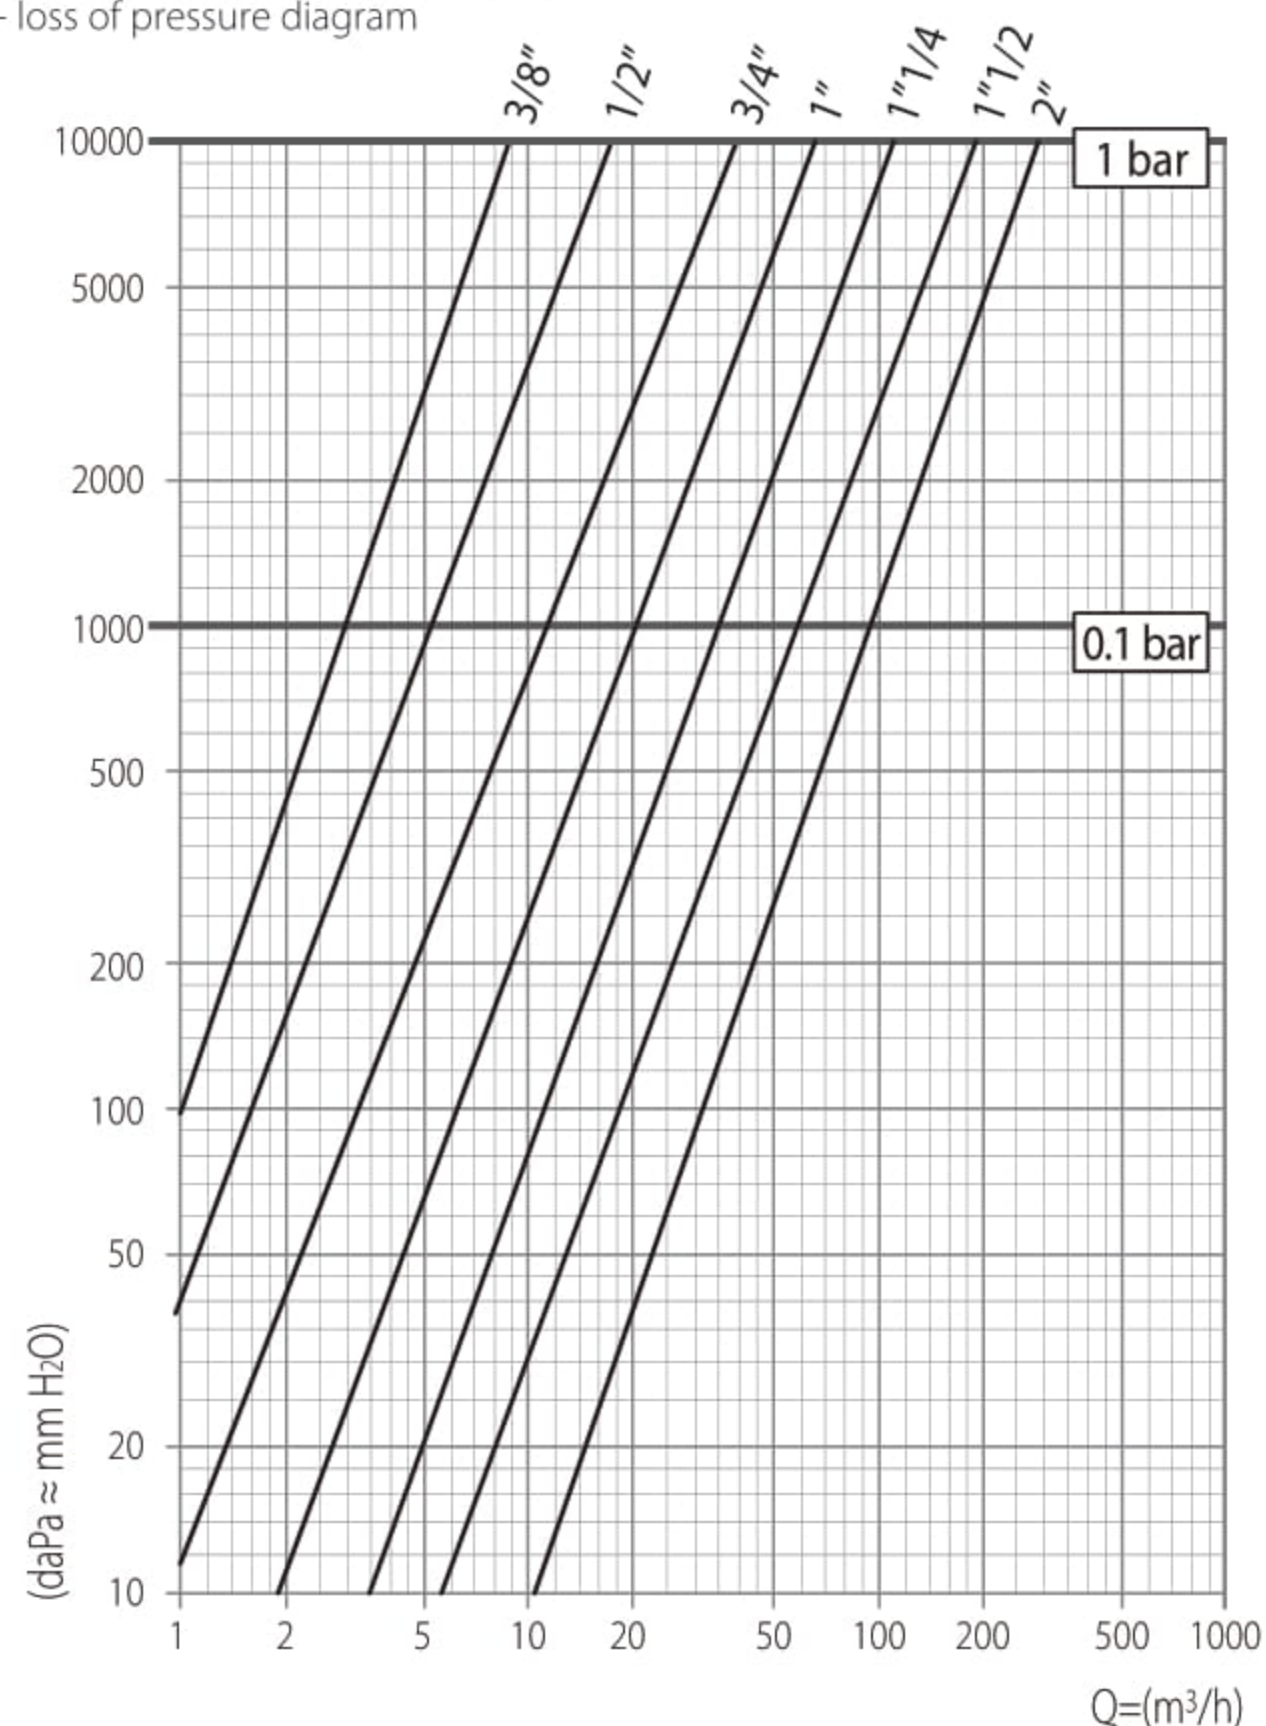

CORPS EN BRONZE
Bronze body

GARNISON NEOPRENE
Neoprene gaskets

VOLANT ABS
ABS handwheel

G	0.1 bar	1 bar
3/8"	8800	2940
1/2"	17000	5100
3/4"	39000	11600
1"	65000	20100
1"1/4	110000	35500
1"1/2	189000	59400
2"	280000	92600

DEBIT D'EAU - lt/h
Flow-rate capacity - lt/h