


Brides tournantes ISO type C PN10

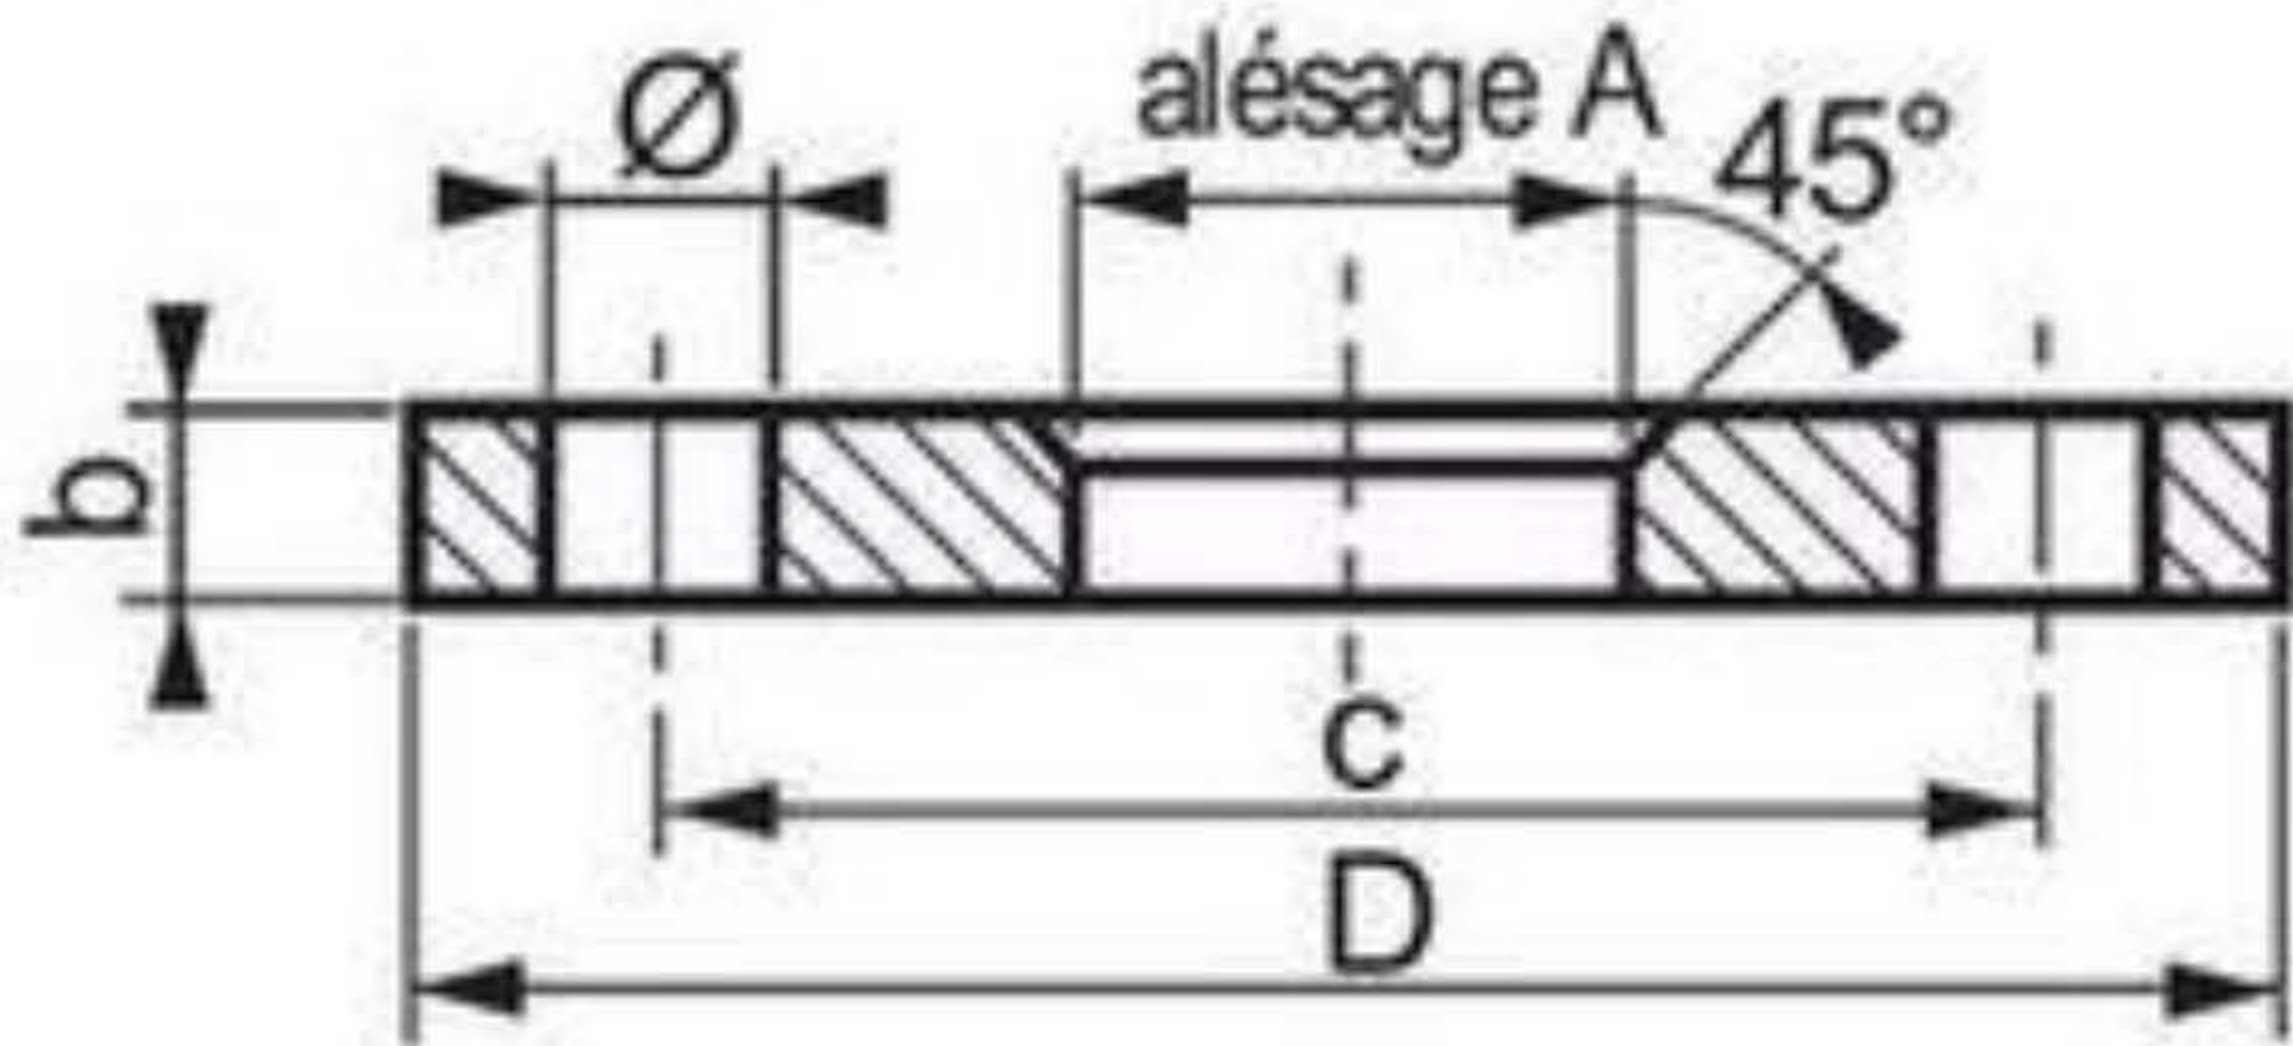

DN	D	Alesage A ISO	b	Nb trous	Diam.	c	Poids (Kg)	Nature
10	90	19	12	4	14	60	0,185	Alu AS13
15	95	24	12	4	14	65	0,19	Alu AS13
20	105	30	12	4	14	75	0,25	Alu AS13
25	115	36	12	4	14	85	0,38	Alu AS13
32	140	46	16	4	18	100	0,56	Alu AS13
40	150	54	16	4	18	110	0,62	Alu AS13
50	165	65	16	4	18	125	0,75	Alu AS13
65	185	81	16	4	18	145	0,9	Alu AS13
80	200	94	18	8	18	160	1,1	Alu AS13
100	220	119	18	8	18	180	1,23	Alu AS13
125	250	144	18	8	18	210	1,53	Alu AS13
150	285	173	18	8	22	240	1,88	Alu AS13
200	340	225	20	8	22	295	2,7	Alu AS13
250	395	279	22	12	22	350	3,65	Alu AS13
300	445	329	22	12	22	400	4,27	Alu AS13
350	505	362	22	16	22	460	5,2	Alu AS13
400	565	413	25	16	25	515	7,17	Alu AS13
450	615	466	25	20	25	565	7,7	Alu AS13
500	670	517	28	20	25	620	9,65	Alu AS13
600	780	618	30	20	30	725	13	Alu AS13
700	895	721	32	24	30	840	17,2	Alu AS13

Les cotes d'encombrement sont susceptibles de varier.