




Flangia libera EN 1092-1

tipo 02/PN10 - PN16 - Acciaio al carbonio

Lap joint flange EN 1092-1 Type 02 - Carbon steel

Bride tournante EN 1092-1 Type 02 - Acier carbone

Brida loca EN 1092-1 Tipo 02 - Acero al carbono

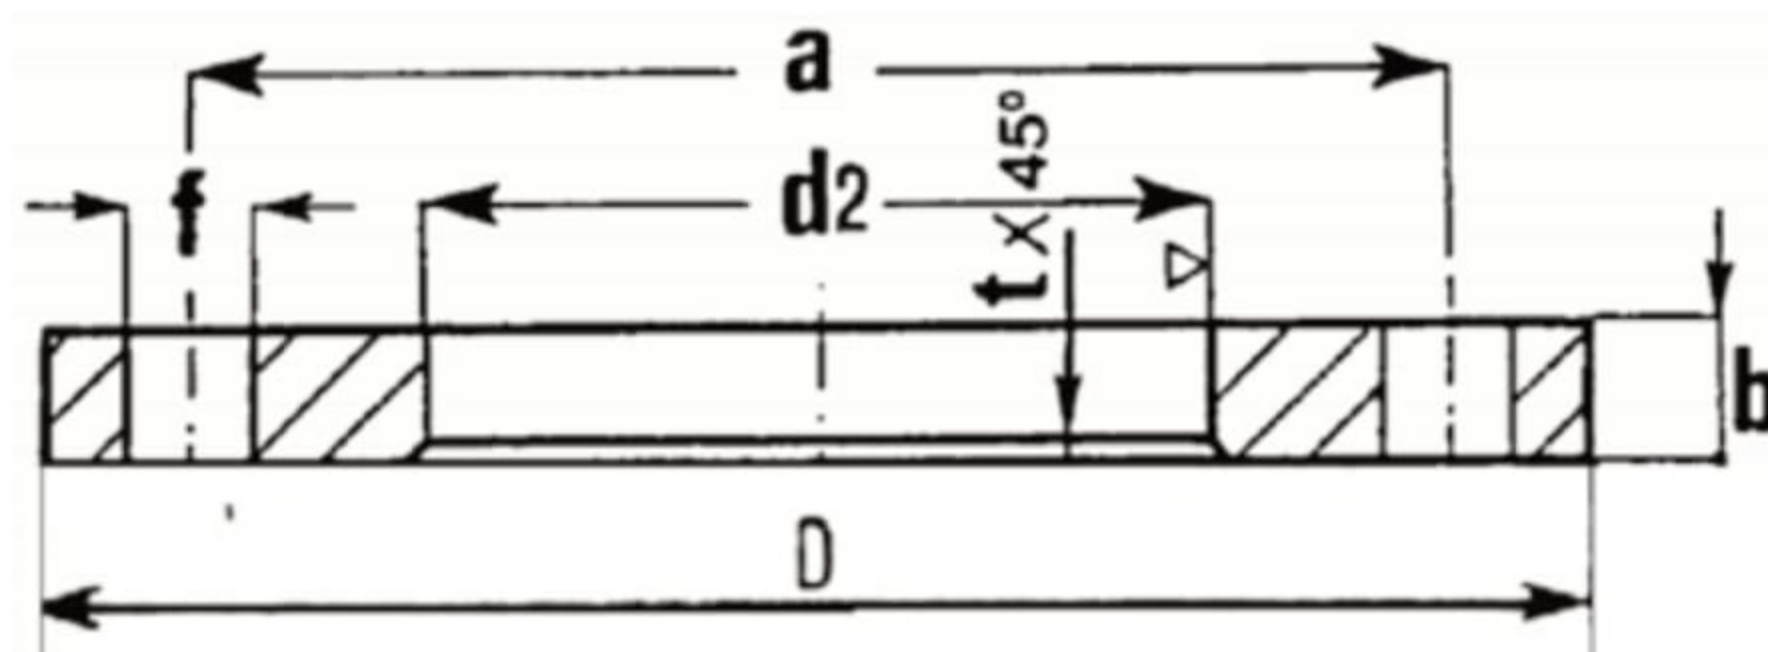

PN 10												
DN			ø Tubo	a	D	b	d2	f	t	Viti	nr. fori	Kg.
200			219,1	295	340	24	226	22	5	M20	8	8,87
250			273	350	395	26	281	22	5	M20	12	11,20
300			323,9	400	445	26	333	22	5	M20	12	12,80

*Zincatura a caldo / Hot-dipped galvanized / Galvanisé à chaud / Galvanizado en caliente

PN 16												
DN			ø Tubo	a	D	b	d2	f	t	Viti	nr. fori	Kg.
15			21,3	65	95	14	25	14	4	M12	4	0,65
20			26,9	75	105	16	31	14	4	M12	4	0,91
25			33,7	85	115	16	38	14	4	M12	4	1,08
32			42,4	100	140	18	47	18	4	M16	4	1,77
40			48,3	110	150	18	53	18	4	M16	4	2,02
50			60,3	125	165	20	65	18	4	M16	4	2,52
65			76,1	145	185	20	81	18	4	M16	4 / 8	3,05
80			88,9	160	200	20	94	18	5	M16	8	3,48
100			114,3	180	220	22	120	18	5	M16	8	4,20
125			139,7	210	250	22	145	18	5	M16	8	5,21
150			168,3	240	285	24	174	22	5	M20	8	6,89
200			219,1	295	340	26	226	22	5	M20	12	9,31
250			273	355	405	29	281	26	5	M24	12	13,50
300			323,9	410	460	32	333	26	5	M24	12	18,00

Hot-dipped galvanized / Galvanisé à chaud