


REDUCTIONS CONCENTRIQUES

REDUCERS CONCENTRIC SEAMLESS

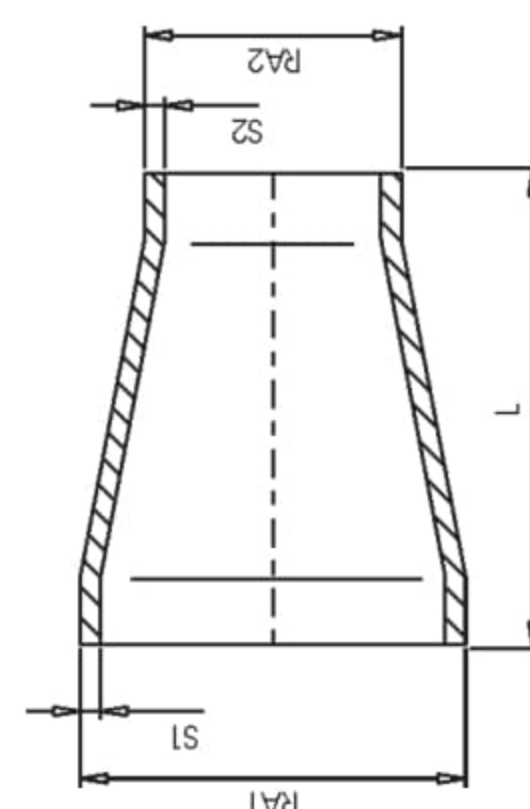


Standards: DIN 86089
EHN 9603/400

RA					s mm			L mm	Poids kg / Pièce weight kg / piece	
in nominal			mm OD							
RA1	x	RA2	RA1	x	RA2	S1	x			S2
1/2		3/8	20		16	1,0		1,0	30	0,01
3/4		3/8	25		16	1,5		1,0	30	0,02
3/4		1/2	25		20	1,5		1,0	30	0,03
1		3/8	30		16	1,5/2,0		1,0	35	0,03/0,04
1		1/2	30		20	1,5/2,0		1,0	35	0,04/0,05
1		3/4	30		25	1,5/2,0		1,5	35	0,05/0,07
1 1/4		3/8	38		16	1,5/2,0		1,0	50	0,05/0,07
1 1/4		1/2	38		20	1,5/2,0		1,0	50	0,06/0,08
1 1/4		3/4	38		25	1,5/2,0		1,5	50	0,07/0,09
1 1/4		1	38		30	1,5/2,0		1,5/2,0	50	0,08/0,11
1 1/2		1/2	44,5		20	1,5/2,5		1,0	80	0,09/0,15
1 1/2		3/4	44,5		25	1,5/2,5		1,5	80	0,11/0,18
1 1/2		1	44,5		30	1,5/2,5		1,5/2,0	80	0,12/0,20
1 1/2		1 1/4	44,5		38	1,5/2,5		1,5/2,0	80	0,13/0,22
2		3/4	57		25	1,5/3,0		1,5	80	0,13/0,26
2		1	57		30	1,5/3,0		1,5/2,0	80	0,14/0,27
2		1 1/4	57		38	1,5/3,0		1,5/2,0	80	0,15/0,30
2		1 1/2	57		44,5	1,5/3,0		1,5/2,5	80	0,16/0,32
2 1/2		1	76		30	2,0/3,5		1,5/2,0	90	0,24/0,42
2 1/2		1 1/4	76		38	2,0/3,5		1,5/2,0	90	0,25/0,44
2 1/2		1 1/2	76		44,5	2,0/3,5		1,5/2,5	90	0,26/0,46
2 1/2		2	76		57	2,0/3,5		1,5/3,0	90	0,29/0,51
3		1 1/4	89		38	2,0/4,0		1,5/2,0	90	0,29/0,58
3		1 1/2	89		44,5	2,0/4,0		1,5/2,5	90	0,30/0,60
3		2	89		57	2,0/4,0		1,5/3,0	90	0,32/0,64
3		2 1/2	89		76	2,0/4,0		2,0/3,5	90	0,40/0,80
4		1 1/2	108		44,5	2,5/5,0		1,5/2,5	100	0,46/0,92
4		2	108		57	2,5/5,0		1,5/3,0	100	0,48/0,96
4		2 1/2	108		76	2,5/5,0		2,0/3,5	100	0,57/1,14
4		3	108		89	2,5/5,0		2,0/4,0	100	0,61/1,22

REDUCTIONS CONCENTRIQUES

REDUCERS CONCENTRIC SEAMLESS

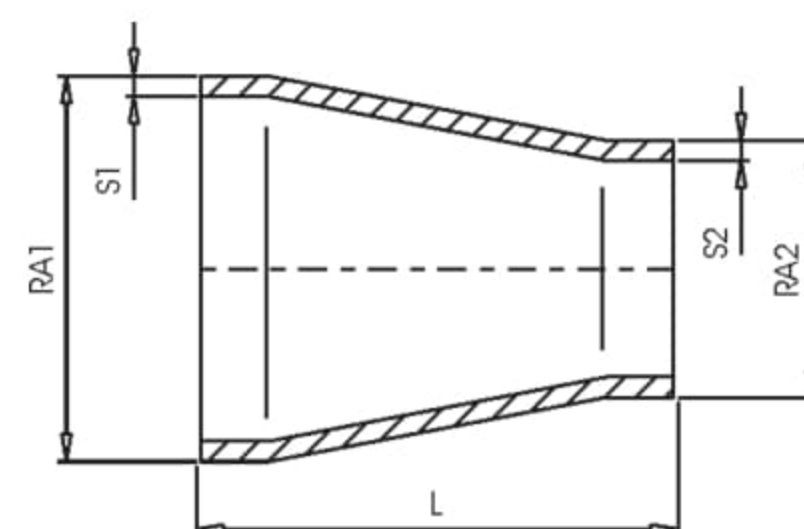

RA					s mm			L mm	Poids kg / Pièce weight kg / piece	
in nominal			mm OD							
RA1	x	RA2	RA1	x	RA2	S1	x	S2		
5		2	133		57	2,5/6,0		1,5/3,0	140	0,80/1,92
5		2	133		76	2,5/6,0		2,0/3,5	140	0,93/2,23
5		3	133		89	2,5/6,0		2,0/4,0	140	0,98/2,35
5		4	133		108	2,5/6,0		2,5/5,0	140	1,16/2,78
6		2,5	159		76	2,5/8,0		2,0/3,5	150	1,13/3,62
6		3	159		89	2,5/8,0		2,0/4,0	150	1,19/3,81
6		4	159		108	2,5/8,0		2,5/5,0	150	1,38/4,42
6		5	159		133	2,5/8,0		2,5/6,0	150	1,51/4,83
7		3	194		89	3,0		2,0	155	1,39
7		4	194		108	3,0		2,5	155	1,58
7		5	194		133	3,0		2,5	155	1,71
7		6	194		159	3,0		2,5	155	1,86
8		4	219		108	3,0/10,0		2,5/5,0	155	2,47/8,23
8		5	219		133	3,0/10,0		2,5/6,0	155	2,60/8,67
8		6	219		159	3,0/10,0		2,5/8,0	155	2,74/9,13
8		7	219		194	3,0/10,0		3,0	155	2,93/9,76
10		5	267		133	3,0/12,0		2,5/6,0	210	3,30/13,20
10		6	267		159	3,0/12,0		2,5/8,0	210	3,49/13,96
10		7	267		194	3,0/12,0		3,0	210	3,75/15,00
10		8	267		219	3,0/12,0		3,0/10,0	210	4,25/16,99
12		7	324		194	4,0		3,0	210	6,02
12		8	324		219	4,0		3,0	210	6,30
12		10	324		267	4,0		3,0	210	6,88
14		8	368		219	4,0		3,0	300	9,76
14		10	368		267	4,0		3,0	300	10,57
14		12	368		324	4,0		4,0	300	11,53