




Flangia libera EN 1092-1 Tipo 02 - PN 6
Lap joint flange EN 1092-1 Type 02 - Carbon steel
Bride tournante EN 1092-1 Type 02 - Acier carbone
Brida loca EN 1092-1 Tipo 02 - Acero al carbono

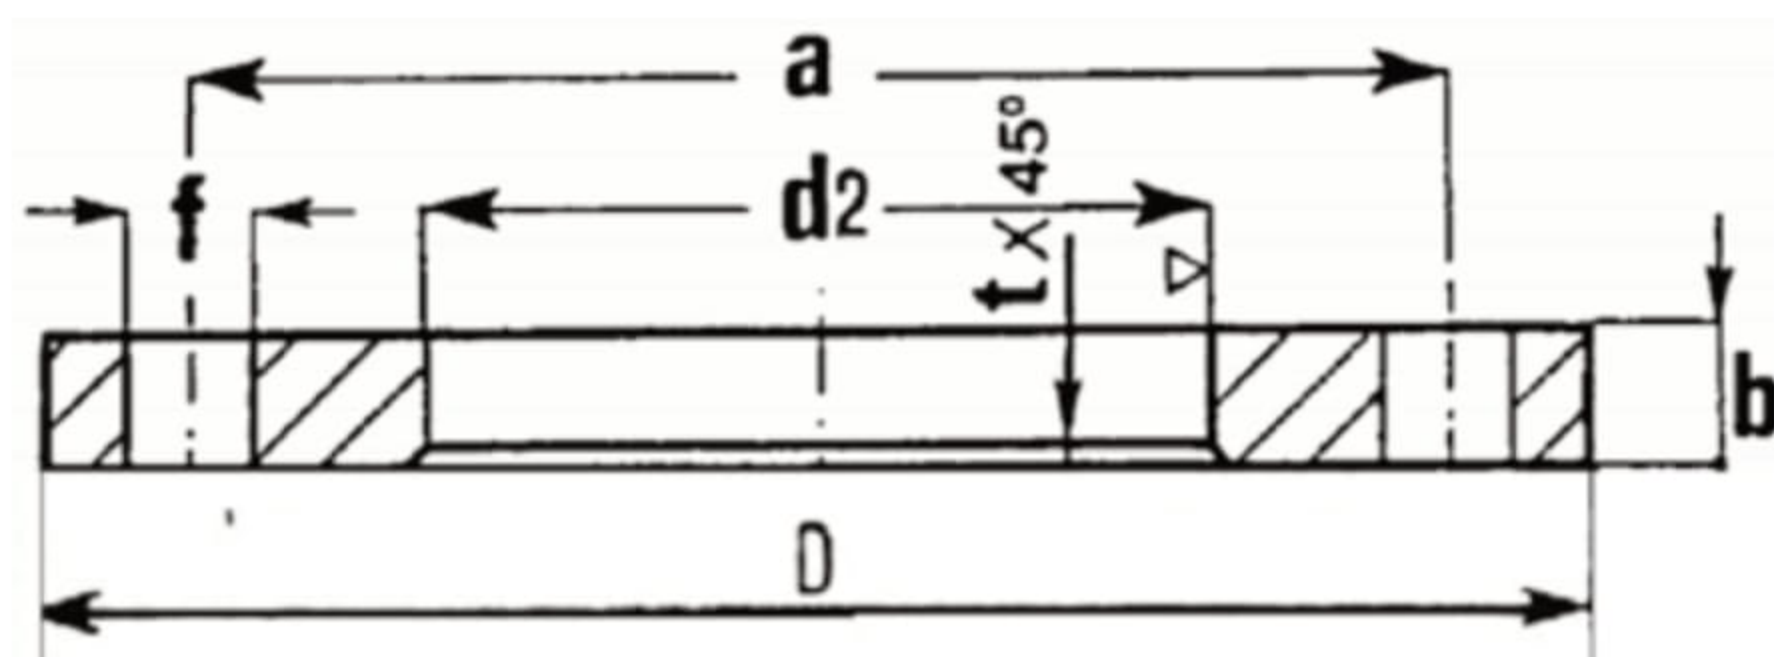

DN			ø Tubo	a	D	b	d2	f	t	Viti	nr. fori	Kg.
15			21,3	55	80	12	25	11	4	M10	4	0,40
20			26,9	65	90	14	31	11	4	M10	4	0,59
25			33,7	75	100	14	38	11	4	M10	4	0,72
32			42,4	90	120	16	47	14	4	M12	4	1,16
40			48,3	100	130	16	53	14	4	M12	4	1,35
50			60,3	110	140	16	65	14	4	M12	4	1,48
65			76,1	130	160	16	81	14	4	M12	4	1,86
80			88,9	150	190	18	94	18	5	M16	4	2,95
100			114,3	170	210	18	120	18	5	M16	4	3,26
125			139,7	200	240	20	145	18	5	M16	8	4,31
150			168,3	225	265	20	174	18	5	M16	8	4,76
200			219,1	280	320	22	226	18	5	M16	8	6,88
250			273	335	375	24	281	18	5	M16	12	8,92
300			323,9	395	440	24	333	22	5	M20	12	11,90
350			355,6	445	490	26	365	22	5	M20	12	16,80
400			406,4	495	540	28	416	22	5	M20	16	19,80

Hot-dipped galvanized / Galvanisé à chaud